

## Topology Control for Self-Adaptation in Wireless Sensor Networks with Temporary Connection Impairment

ARIJIT ROY, Indian Institute of Technology Kharagpur  
SUDIP MISRA, Indian Institute of Technology Kharagpur  
PUSHPENDU KAR, Indian Institute of Technology Kharagpur  
AYAN MONDAL, Indian Institute of Technology Kharagpur

In this work, the problem of topology control for self-adaptation in stationary Wireless Sensor Networks (WSNs) is revisited, specifically for the case of networks with a subset of nodes having temporary connection impairment between them. This study focuses on misbehaviors arising due to the presence of “dumb” nodes [Misra et al. 2014; Roy et al. 2014c; Roy et al. 2014b; Roy et al. 2014a; Kar and Misra 2015], which can sense its surroundings, but cannot communicate with its neighbors due to shrinkage in its communication range by the environmental effects attributed to change in temperature, rainfall, and fog. However, a dumb node is expected to behave normally on the onset of favorable environmental conditions. Therefore, the presence of such dumb nodes in the network gives rise to impaired connectivity between a subset of nodes, and, consequently, result in change in topology. Such phenomena are dynamic in nature, and are, thus, distinct from the phenomena attributed to traditional isolation problem considered in stationary WSNs. Activation of all the sensor nodes simultaneously is not necessarily energy-efficient and cost-effective. In order to maintain self-adaptivity of the network, two algorithms named *Connectivity Re-establishment in the presence of Dumb nodes (CoRD)* and *Connectivity Re-establishment in the presence of Dumb nodes Without Applying Constraints (CoRDWAC)* are designed. The performance of these algorithms is evaluated through simulation-based experiments. Further, it is also observed that the performance of CoRD is better than the existing topology control protocols – LETC and A1 – with respect to the number of nodes activated, overhead and energy consumption.

Categories and Subject Descriptors: C.2.2 [Wireless Sensor Networks]: Environmental Effect, Connectivity

General Terms: Connectivity re-establishment, Performance, Data gathering

Additional Key Words and Phrases: Dumb Node, Self-Adptivity, Connectivity, Dynamic Shrinkage, Wireless Sensor Network

### ACM Reference Format:

Arijit Roy, Sudip Misra, Pushpendu Kar, and Ayan Mondal 2015. Topology Control for Self-Adaptation in Wireless Sensor Networks with Temporary Connection Impairment. *ACM Trans. Autonom. Adapt. Syst.* V, N, Article A (January YYYY), 35 pages.

DOI : <http://dx.doi.org/10.1145/0000000.0000000>

## 1. INTRODUCTION

Due to the rapid advancement of Micro Electro-Mechanical Systems (MEMS), Wireless Sensor Networks (WSNs) have attained prominence in application domains which require monitoring physical phenomena and objects [Chandrasekar et al. 2008; Bhat-

---

Author's addresses: A. Roy, Indian Institute of Technology Kharagpur, West Bengal, India; S. Misra, Indian Institute of Technology Kharagpur, West Bengal, India; P. Kar, Indian Institute of Technology Kharagpur, West Bengal, India; A. Mondal, Indian Institute of Technology Kharagpur, West Bengal, India.

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies show this notice on the first page or initial screen of a display along with the full citation. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, to republish, to post on servers, to redistribute to lists, or to use any component of this work in other works requires prior specific permission and/or a fee. Permissions may be requested from Publications Dept., ACM, Inc., 2 Penn Plaza, Suite 701, New York, NY 10121-0701 USA, fax +1 (212) 869-0481, or [permissions@acm.org](mailto:permissions@acm.org).

© YYYY ACM 1556-4665/YYYY/01-ARTA \$15.00

DOI : <http://dx.doi.org/10.1145/0000000.0000000>

tacharjee et al. 2012; Fok et al. 2009]. A WSN consists of a set of low power sensor nodes, with each having limited transmission range. Consequently, the intermediate nodes act as relays to forward the sensed information to the sink [Akyildiz et al. 2002b; Akyildiz et al. 2002a]. Irrespective of the issue of self-adaptation and the type of deployment, sensor nodes work in a collaborative manner to measure their surrounding physical parameters such as light, pressure, temperature, humidity, and vibration. Consequently, active participation and collaboration of an optimum set of nodes is crucial to maintain Quality of Service (QoS) in the network. Maintaining connectivity among the nodes is essential for achieving this [Fan and Jin 2010; Zhang et al. 2009].

Various environmental conditions such as temperature, fog, and rainfall impact the communication between sensor nodes, consequently, decrease the communication range [Anastasi et al. 2004; Paradis and Han 2007; Bannister et al. 2008; Boano et al. 2010]. Due to environmental factors, when the transmission range of a sensor node decreases below a threshold value, the node becomes incapable of continuing to communicate with its neighbor nodes, which were, otherwise, previously within the communication range of that particular node. In such a scenario, connectivity is lost between the sensor nodes, and thus, one or more nodes get isolated from the network. Such nodes can sense their surroundings, but cannot transmit the sensed data to the other nodes. These nodes are characterized as *dumb* [Misra et al. 2014; Roy et al. 2014a; Roy et al. 2014c; Roy et al. 2014b; Kar and Misra 2015]. It may be noted that dumb behavior is a unique type of misbehavior and its difference with other misbehaviors or channel fading is elaborately discussed in [Misra et al. 2014]. As the environmental conditions are temporal in nature, the dumb behavior in a sensor node is also temporal. Therefore, a dumb node can behave as a normal node, when such adverse environmental conditions disappear. Considering the loss in connectivity in the network in the presence of dumb behavior of sensor nodes, we propose a scheme in order to re-establish connectivity. We emphasize that the problem we address and the solution we propose are specifically targeted to address this unique type of misbehavior. Additionally, many price-based and currency-based approaches were explored [Liu and Krishnamachari 2006; Edalat et al. 2009; Buttyan and Hubaux 2001] for studying the cooperation and routing of data packets between a pair of nodes in wireless networks. To address the issue of disconnection among nodes due to dumb behavior and to maintain self-adaptivity, we use a *price-based* scheme to choose the most reliable path.

### 1.1. Motivation

WSNs are, typically, resource-constrained, unattended, and autonomous. So, they are prone to denial of services (DoS) attacks, wormhole attack (specifically, in IP-based WSNs) [Sarigiannidis et al. 2015b], sybil attack [Sarigiannidis et al. 2015a], faults, bad environmental effects, and misbehavior [Krishnamachari and Iyengar 2004]. In this work, we focus on the *dumb* behavior [Misra et al. 2014] of nodes, which is caused by the shrinkage in communication range due to environmental factors such as fog, temperature, and rainfall. Therefore, connectivity may be lost between nodes in a network, and the sensed information by these nodes cannot be transmitted further. In a WSN, it is important to ensure that every sensor node can communicate with the sink directly, or over a multi-hop path [Lloyd 2007]. Due to the temporal nature of the environmental effects, a sensor node exhibiting dumb behavior at a particular time instant, may not exhibit this at a later instant. When dumb behavior arises in the sensor nodes, the intermediate nodes need to be activated for maintaining adequate connectivity. As sensor nodes have limited energy, the cost involved in the activation of intermediate nodes throughout the network life-time is high [M. Chatterjee and Sengupta 2010; Wang et al. 2009]. Therefore, a subset of intermediate nodes should be activated to maintain connectivity between nodes in a network, instead of all of them.

With the restoration of favorable environmental conditions, the sensor nodes start operating as normal and these newly activated intermediate nodes should be progressively deactivated, in a self-adaptive manner to avoid redundant connectivity [Misra et al. 2011] for reducing the overall energy consumption of the network. It is indeed true that the connectivity re-establishment problem is well-known and is extensively researched, as stated earlier. But, there is no literature which addressed connectivity re-establishment in the presence of dumb nodes. This work is the first to address the problem. Moreover, the concept of dumb node is newly explored by Misra *et al.* [2014]. Further, the existing schemes for re-establishing connectivity among sensor nodes assume stationarity in behavior, which make them unsuitable for use in the case of dumb nodes.

## 1.2. Contribution

A WSN is a multi-hop communication network, in which connectivity between nodes is an important factor to send the sensed information to the sink. In this paper, we consider the decrease in communication range due to environmental conditions such as temperature, rainfall, and fog. Consequently, there is loss in connectivity between the activated nodes, isolation of node(s) from the network, and network partitioning. The problem is interesting, as the effect is not permanent. It is transient, as with the restoration of favorable environmental conditions, the nodes can perform their normal operations. The specific *contributions* in this paper are summarized as follows:

- Proposing a price-based scheme for establishing a path between different nodes, which is disconnected due to the shrinkage in communication range, and thus, ensuring that the selected path is the most reliable among all the existing ones.
- The proposed solution is theoretically characterized from different perspectives.
- Simulation-based performance evolution of the proposed scheme.

The rest of the paper is organized as follows. Section 2 describes the related work done in this area. Section 3.1 defines a dumb node and gives the characteristics of it. Section 3.2 describes different cases of connectivity loss and their respective topology changes. The system is modeled and the solution is proposed in Sections 4 and 5. We design the simulation and describe the simulation settings in Section 6. The analysis and discussion of results are given in Section 7. We conclude the work in Section 8.

## 2. RELATED WORK

In WSN, cooperation among sensor nodes is a very important factor for maintaining successful operation of the network. Due to disruption (breakage) of links, existing cooperation among nodes is lost. This result in the degradation in the performance of the network. Misra and Jain [Misra and Jain 2011] proposed a Markov Decision Process (MDP)-based self-configuring and self-healing algorithm for activating optimal number of neighbor nodes, which form the backbone of the entire network. However, dumb behavior impedes the neighbor nodes to communicate and get activation message. Fanimokun and Frolik [Fanimokun and Frolik 2003] discussed various issues of connectivity with a low-cost environmental sensing network. They have experimentally evaluated the propagation effects for three environments: open, wooded, and hilly. Bonvoisin et al. [Bonvoisin et al. 2011] addressed the issues related to environmental impacts of WSN, and proposed an assessment model for it. This assessment model is based on a two part analysis – life cycle assessment, and network energy. They designed the environmental impacts as a sum of different stages namely deployment, replacement, energy consumption, and dismantling. The authors compared the result for two scenarios: (a) exploitation, and (b) deployment dismantling. Rajagopalan and Varshney [Rajagopalan and Varshney 2009] considered the variation in connectivity in

WSNs with time. The environmental effects such as rainfall and growing plant reduces the signal strength for communication between sensor nodes.

Fog, rainfall, and snowfall have detrimental effects on signal propagation and link quality of WSNs. These environmental effects reduce the signal strength, as they severely affect the communication range of a sensor node [Nadeem *et al.* 2009; Anastasi *et al.* 2004; Bannister *et al.* 2008; Markham *et al.* 2011]. Consequently, communication range of sensor nodes may shrink, which may lead to some of the nodes getting isolated from the network, resulting in partitioning of the network into many parts. Anastasi *et al.* showed the change in performance of a sensor node due to the presence of environmental effects [Anastasi *et al.* 2004]. Paradis *et al.* reported that permanent or temporary wireless link failures can happen due to the change in environmental conditions [Paradis and Han 2007]. Again, Bannister *et al.*, Nadeem *et al.*, and Boano *et al.* reported that temperature is also one of the influencing facts affecting signal strength [Bannister *et al.* 2008; Nadeem *et al.* 2009; Boano *et al.* 2010]. Consequently the transmission power and communication links among the sensor nodes get affected. Jhang *et al.* [Jiang *et al.* 2007] presented a method that covers holes for re-connectivity and coverage in the network using a localized control technique. Ammari *et al.* [H. M. Ammari and S. K. Das 2008] discussed the issue of coverage and connectivity. In this work, the authors consider two problem – Sensing Coverage Phase Transition (SCPT) and Network Connectivity Phase Transition (NCPT). They developed the correlated disk model for addressing these issues, considering non-orthogonal nature of sensing coverage and network connectivity.

There exit saliency in difference between the dumb behavior and behaviors arising due to other impairments such as fading, on which lot of literature already exist. Some of the existing literature are discussed here. Banavar *et al.* [Banavar *et al.* 2010] estimated correlative information with different channel conditions over multiple access channel. They evaluated the asymptotic variation of multiple access fading channel. However, they have not proposed any solution to overcome environmental effects. Mousavi *et al.* [Mousavi *et al.* 2016] studied time-varying fading channels and proposed a two-phase transmission scheme in order to select a subset of sensors to transmit the sensed observation to the Fusion Centre (FC). Quevedo *et al.* [D. E. Quevedo and Johansson 2013] estimated sufficient conditions of using Kalman filter in the presence of channel fading in wireless sensor networks, while the underlying network is described as a (semi-) Markov chain. However, they have not proposed any solution to overcome any environmental effect.

On the other hand, Biswas *et al.* [Biswas *et al.* 2013] presented a work that studied the effects on energy efficiency due to the placement of relay in a Wireless Sensor Network, in the presence of fading channel. They concluded that relay placement depends on constellation size ( $M$ ), path loss exponent ( $n$ ), and fading parameters ( $\eta$  and  $\mu$ ). Mostofi and Murray discussed the effects of time-varying communication links on the control performance of a mobile sensor network [Mostofi and Murray 2004]. Further, they provided the analytical and simulation results, which shows that fading is one of the major reasons for poor performance of the network. However, they have not considered environmental effects other than fading. Liu *et al.* [Liu 2006] discussed the effects on the MAC protocol of Wireless Sensor Network in the presence of fading and shadowing. Authors concluded that fading and shadowing have significant impact on the performance of a WSN. However, they did not propose any solution to overcome any environmental effect. Primarily, the work of Dong *et al.* [Dong *et al.* 2007] focuses on the fading channel, in which they calculated the probability of a node being isolated from the network. Thereafter, the probability of forming a connected network is calculated. The authors in this work show the degradation of the network performance with the help of numerical results. Further, the authors determine the minimum den-

sity required in order to form a connected network. Fang and Li primarily focused on fading and noise in a channel [Fang and Li 2008]. Further, the authors present a scheme designing the compression matrices. This work does not give any solution on the temporal behavior of a node, which can be taken into account in order to increase the network performances.

There also exist several existing literature on split network. Some of the existing literature are discussed here. Ammari et al. [Ammari and Das 2006] developed the Augmented Equilateral Triangle (AET) model, which guarantees sensing  $k$ -coverage, and proved that network connectivity of homogeneous and heterogeneous of  $k$ -covered WSNs (kCWSN) is higher than the degree of sensing coverage. Tseng *et al.* [Tseng et al. 2010] considered isolated WSNs that are disconnected from the outside world for extended duration of time. It depends on mobile mules to visit the isolated node and carries its non-real time sensed data to the outside world, which is collected once in several months. They also addressed issue of storage requirement arising due to infrequent collection of data from the isolated network. Dini et al. [Dini et al. 2008] proposed a method for repairing a split network. They used mobile nodes by finding the proper position in the network, so that connectivity between the sensor nodes can be re-established. However, this method may not be useful when the WSN deployed area is not planer. In the presence of any obstacle, there is disruption in the movement of mobile nodes. Yang et al. [Yang et al. 2013] proposed a Dynamic Local Stitching (DLS) algorithm that ensures repairment of the broken path in a WSN. In DLS, the minimum energy consumption relay model is used to repair the broken path. Senel et al. [Senel et al. 2011] proposed a spider-web based approach with the help of minimum spanning tree to reconnect the partitioned network. In [Senel et al. 2011], they considered partitioning occurring due to the damage of sensor nodes. They deployed relay nodes to reconnect the partitioned network, which is permanently deployed. However, there may arise the condition that the network is partitioned due to the dumb nature of sensor nodes, resulting from some environmental conditions such as fog, and rainfall. In such a scenario, permanent deployment of relay nodes may not be suitable, as the nodes resume their normal operation with the onset of favorable environmental conditions. In another work, Okorafor *et al.* [Okorafor and Kundur 2009] studied the problem of node isolation in a wireless optical sensor network (WOSN). Specifically, the authors try to determine the node isolation property in a WOSN. Khelifa *et al.* [Khelifa et al. 2009] studied the problem of loss in connectivity in a mobile wireless sensor network. They propose a scheme which enables to monitor, maintain, and repair network connectivity. Therefore, the proposed scheme is useful to increase the degree of connectivity in the network. Yet, the increasing degree of a node does not ensure connectivity in the presence of environmental effects, as the communication range of each node reduces due to the presence of adverse environmental effects. However, this literatures do not consider the dynamic loss in connectivity in WSN. We consider a WSN where nodes get disconnected dynamically from the network in the presence of environmental conditions.

None of these existing literature studies the problem of link re-establishment in dumb nodes, which is characteristically *dynamic* and *temporal* in nature. At this juncture, it is pertinent to emphasize that both “dynamic” and “temporal” behaviors in connectivity due to the presence of environmental conditions make this problem *unique*, and consequently, interesting in the case of dumb nodes. Additionally, the existing works do not provide any scheme for re-establishing connectivity in the presence of such environmental conditions. Thus, the problem discussed in this paper is unique and is not addressed in any literature. A review of the existing literature reveals that different types of topology maintenance and connectivity re-establishment mechanisms are used between the isolated nodes and the partitioned network. However, all

these mechanisms may not be suitable for establishing connectivity between isolated nodes due to shrinkage in communication range in the presence of bad environmental conditions. The temporal nature of bad environmental conditions leads to variable shrinkage of communication range, which changes the neighbor list of a node at different times. The change in neighbor list renders the topology of a network to vary with time. Consequently, the existing solutions are of limited use in such scenarios.

### 3. PROBLEM DESCRIPTION

#### 3.1. Dumb Nodes

Our work is based on the concept of dumb nodes. As mentioned in Section 1, dumb behavior arises due to the occurrence of increase environmental phenomena such as fog, rainfall, and temperature. If the transmission range gets affected, then a node can sense the physical phenomena in its surroundings, but cannot communicate with the other nodes.

We have considered two types of nodes in the network – (a) normal behaved node, and (b) dumb node. Further, all the sensor nodes are considered to be homogeneous, which implies that each node has the same capabilities of sensing, transmitting, and receiving. Table I lists all the notations used in this work.

Table I. Notation Table

Notation	Description
$\Psi_n$	Normal behavior of a node
$\Psi_d$	Dumb behavior of a node
$r_c^{ne}$	Required communication range of a node to activated neighbor node $ne$
$d_{min}$	Distance to the nearest active neighbor node
$R$	Maximum specified fixed communication range of sensor node
$r_c(t)$	Communication range at time instant $t$
$ne$	List of activated neighbor node
$E_f$	Intensity of bad environmental effect
$P_r$	Receiving power
$P_d$	Power density
$P_t$	Transmission power
$G_t$	Transmission gain
$RE_i$	Residual energy of node $n_i$
$RSS_i$	Received signal strength of node $n_i$
$HC_i$	Hop-count of a node $n_i$ starting from START node
$d_i$	Distance of node $n_i$ from straight line between START node and END node
$de_i$	Distance between any node $n_i$ and END node
$L$	Distance between START node and END node
$RE_{min}$	Minimum residual energy
$RE_{max}$	Maximum residual energy
$RSS_{min}$	Minimum receive signal strength
$RSS_{max}$	Maximum receive signal strength
$HC_{max}$	Maximum hop-count of a path
$C_i$	Cost of node $n_i$ to precipitate in connectivity re-establishment
$t_{reply}$	Expected time to reply from END node
$t_{repeat}$	Expected time to repeat the algorithm
$b_i$	Benefit of node $n_i$
$B_i^C$	Cumulative benefit of node $n_i$

**Definition 1.** *Normal Behavior:* A sensor node, which can sense the physical phenomena in its surroundings and transmit the sensed data during its entire lifetime, is termed as normal behaved node. Such behavior is denoted as  $\Psi_n$ .

$$\Psi_n = \begin{cases} 1, & (0 < d_{min} \leq r_c(t_i) \leq R) \quad \forall t_i \\ 0, & \text{otherwise} \end{cases}$$

**Definition 2. Dumb Behavior:** A sensor node that can sense the physical phenomena in its surroundings, and cannot transmit the sensed data at a certain instant of time due to the presence of adverse environmental condition, but transmit at a later instant with the resumption of favorable environmental condition, is termed as a dumb node. Such behavior is denoted by  $\Psi_d$ . Mathematically,

$$\Psi_d = \begin{cases} 1, & \{(0 < d_{min} \leq r_c(t_i) \leq R)\} \wedge \{0 \leq r_c(t_j) < d_{min} < R\} \quad \forall t_i \forall t_j \quad t_i \neq t_j \\ 0, & \text{otherwise} \end{cases}$$

In Fig. 1, we focus on a part of the deployed WSN. Here, node A represents any node in the network. At time instant  $t_i$ , the communication range of node is  $r_c(t_i)$ . All other nodes present in the communication range ( $r_c(t_i)$ ) of node A are its neighbors. Among all the neighbor nodes of A, node B is the nearest neighbor node. Thus, we define the distance between nodes A and B as  $d_{min}$ . At time instant  $t_j$ , due to the presence of adverse environmental conditions, the communication range of node A shrinks below  $d_{min}$  and it becomes  $r_c(t_j)$ . At the time instant  $t_j$ , all the neighbor nodes of node A are out side its communication range,  $r_c(t_j)$ . Consequently, node A is unable to communicate with any of its neighbor nodes.

$d_{min}$  be the distance from the node A to its nearest neighbor node B which is mathematically represented as:

$$d_{min} = \min(r_c^{ne}) \quad \forall ne \quad (1)$$

where  $\min(r_c^{ne})$  is the minimum communication range for the nearest activated neighbor node  $ne$ . Let at time instant  $t_i$ , the communication range be  $r_c(t_i)$ . For proper connectivity in the network, each node should maintain the property,  $R \geq r_c(t_i) \geq d_{min}$ . Due to environmental effects, at time  $t_j$ , a node becomes isolated when its communication range shrinks below  $d_{min}$ , i.e.,  $r_c(t_j) < d_{min}$ .

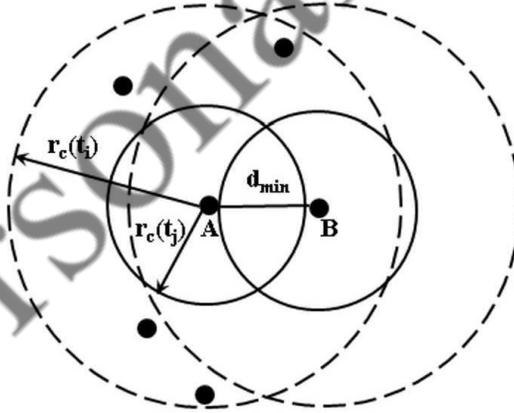


Fig. 1. Shrinkage in Communication Range of a Sensor Node

### 3.2. Change of Topology due to Dumb Nodes

The intensity of bad environmental effects may vary both spatially and temporally. Consequently, the shrinkage in communication range of a sensor node also varies. In the existing literature [Boano et al. 2010], [Markham et al. 2011], it has been established that with the increasing value of temperature, and rainfall, the effects on signal strength also increases.

**Proposition 1.** *If the effect of environmental intensity increases, the communication range of a node decreases.*

PROOF. The intensity of environmental effects is denoted by  $E_f$ . We know that the receiving power,  $P_r$ , decreases with the increase of intensity of these environmental effects. So,

$$\frac{1}{E_f} \propto P_r \quad (2)$$

Power Density,  $P_d = \frac{P_t G_t}{4\pi R^2}$ , where  $P_d$  is the power density,  $P_t$  is the transmission power,  $G_t$  is the transmission gain, and  $R$  is the transmission range of a sensor node, respectively. For computing the minimum power density  $(P_d)_{min}$ , there is maximum range  $R_{max}$

$$(P_d)_{min} = \frac{P_t G_t}{4\pi R_{max}^2}$$

$$G_t = \frac{(P_d)_{min} 4\pi R_{max}^2}{P_t} \quad (3)$$

If the maximum transmission range  $R_{max}$  increases to  $R'_{max}$ , the transmission gain  $G_t$  also increases. We have,

$$G'_t = \frac{(P_d)_{min} 4\pi R'^2_{max}}{P_t} \quad (4)$$

From Equations (3) and (4), we get,

$$\frac{G_t}{G'_t} = \frac{R_{max}^2}{R'^2_{max}} \quad (5)$$

From Equation (5), we have,

$$G_t \propto R_{max}^2 \quad (6)$$

Again, from Friis' Equation [Levis 2005], we have,

$$P_r = P_t G_t G_r \left( \frac{\lambda}{4\pi d} \right)^2 \quad (7)$$

where,  $P_r$  and  $P_t$  are the receiving and transmitting power,  $G_r$  and  $G_t$  are the receiver and transmitter gain,  $\lambda$  is the wavelength, and  $d$  is the distance between the two antennas. When the gain changes to  $G'_t$ , the changed receiving power,

$$P'_r = P_t G'_t G_r \left( \frac{\lambda}{4\pi d} \right)^2 \quad (8)$$

From Equations (7) and (8), we have,

$$P_r \propto G_t \quad (9)$$

From Equations (6) and (9), we have,

$$P_r \propto R_{max}^2 \quad (10)$$

From Equation (2), put the value of  $P_r$  in Equation (10),

$$\frac{1}{E_f} \propto R_{max}^2 \quad (11)$$

From Equation (11), it is found that an increase in the intensity of these environmental effects determines the impact in the range of communication of a sensor node.  $\square$

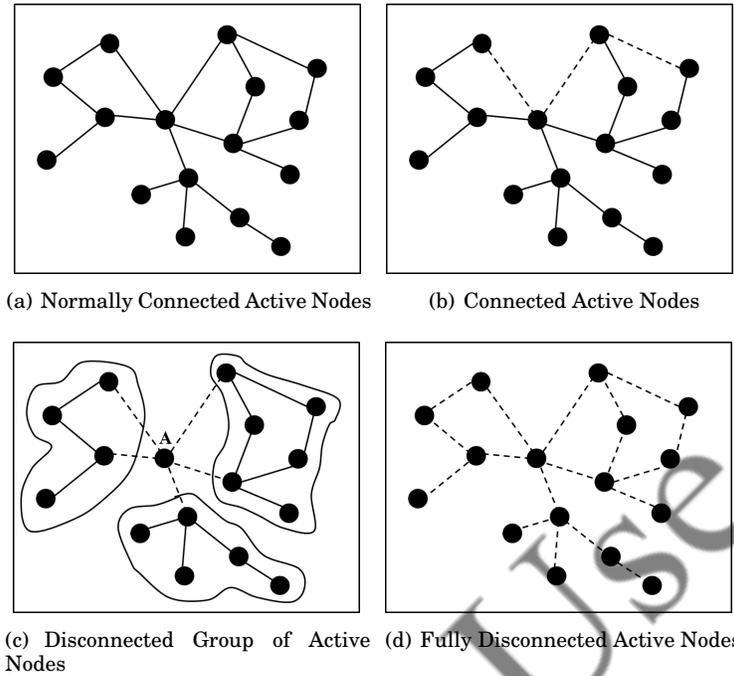


Fig. 2. Change in Topology due to Shrinkage of Communication Range[Misra et al. 2014]

We consider a network as shown in Fig. 2(a). Consequently, a network can be considered as a graph  $G = (V, E)$ , where the set of nodes is represented by  $V$ , and the set of links between nodes is represented by  $E$ . The number of nodes  $|V| = n$ . The sink node is denoted as  $s \in V$ . Depending on the shrinkage of communication range of sensor nodes, the effects due to environmental factors are classified into the following cases:

**Case 1:** If the intensity of the bad environmental effects is very less, there may be shrinkage in the communication range. This minimum shrinkage does not affect all existing connectivity in the network, and it disconnects few existing connectivities. Due to low intensity of bad environmental effects, the received signal strength may decrease, but remain above the communication threshold for few links. In this case, every active node remains connected with every other node in the network via single-hop or multi-hop connectivity, as shown in Fig. 2(b). This can be defined mathematically as,  $\forall v \in V$  there exists path a  $sv$ .

In this case, as there is no loss of connectivity, there is no need to activate any intermediate node(s). However, in respect of quality of service, there may be packet drops due to shrinkage of communication range, and as a remedy, the intermediate node(s) need to be activated. Our work concerns connectivity only, as we do not consider the issues related to quality of service.

**Case 2:** If the intensity of the bad environmental effect is non-uniform, there may be splitting of network into many parts. In Fig. 2(c), node A is affected by bad environmental effects and there is shrinkage of communication range (shown by dotted). Consequently, the original network is split into three parts. Mathematically, this can be defined as, for all positive integers  $n_1, n_2, \dots, n_k$ , such that  $\sum_{i=1}^k n_i = n$ ,

there exists a partition of  $V(G)$  into  $k$  parts  $V_1, V_2, \dots, V_k$  such that  $|V_i| = n_i$ , and  $V_i$  induces a connected sub-graph of  $G$  for  $1 \leq i \leq k$  and  $\forall v \in V_i$  there is no path  $sv$ .

In this case, as there is loss of connectivity between node(s), it is necessary to activate intermediate sleep node(s) to re-establish connectivity between the isolated node(s).

**Case 3:** If the intensity of the bad environmental effect is extreme, all the nodes in the network may become isolated from one another. There will be no path from a node to the sink node. In Fig. 2(d), it is shown that there is isolation between nodes due to shrinkage of communication range. Mathematically,  $\forall v, \forall w \in V$  there is no path  $vw$ , when  $v \neq w$ .

Here, as all the node(s) become isolated from one another, every node needs to participate to re-establish connectivity between them by activating the intermediate sleep node(s).

#### 4. SYSTEM MODEL

In this work, we have specifically considered network partitioning and isolation of nodes due to dumb behavior. A sensor node becomes isolated at a particular time instant, but remains connected at a different time instants, due to the dynamic(changing) nature of the dumb behavior. Our goal is to re-establish the most reliable path between these disconnected nodes by activating the intermediate sleep nodes. For re-establishing reliable connectivity, the proposed scheme activates a reduced number of intermediate sleep nodes between the *START* and the *END* nodes. One of the two disconnected nodes starts the connectivity procedure by using a price-based scheme. The price-based scheme is formulated as  $\Gamma = \langle P, B \rangle$ , where  $P$  is the set of participants, i.e.,  $P = \{p_1, p_2, p_3, \dots, p_n\}$ , and  $B = \{b_p \mid p \in P\}$  is the set of benefit functions. In our proposed algorithm, we use three types of nodes as follows:

*START Node:* A node  $S$  is said to be the *START* node, if it satisfies the following conditions:

- i.  $S$  is a dumb node
- ii.  $S$  initiates *CoRD* to connect with an *END* node

*END Node:* A node  $E$  is said to be an *END* node, which is responsible for:

- i. Being a parent node.
- ii. Choosing one of the paths from itself to  $S$ .

*MASTER Node:* A node which is responsible for:

- i. Calculating its own benefit, final benefit, and cumulative.
- ii. Forwarding the process by activating neighbor nodes within its reduced communication range.

A collection of GPS-enabled sensor nodes are deployed over a terrain. After deployment, every node chooses its parent from the neighbor nodes that are within its communication range. Through the parent node, a node can communicate with the sink node, i.e., if a node is connected to its parent node, then it is able to connect with the sink. After finding the parent node, each node holds its respective parent ids. Due to the existence of adverse environmental effect, there is shrinkage in communication range in one or more node(s), and, consequently, the connectivity between a node and the parent node is lost, which, in turn, results in loss of connectivity with the sink node. In such a situation, a node having lost-connectivity with the parent initiates the proposed scheme *Connectivity Re-establishment in the presence of Dumb Nodes (CoRD)* to

re-establish connectivity. In *CoRD*, the isolated node activates the intermediate sleep nodes to re-establish connectivity with its parent node. In energy-constrained WSNs,

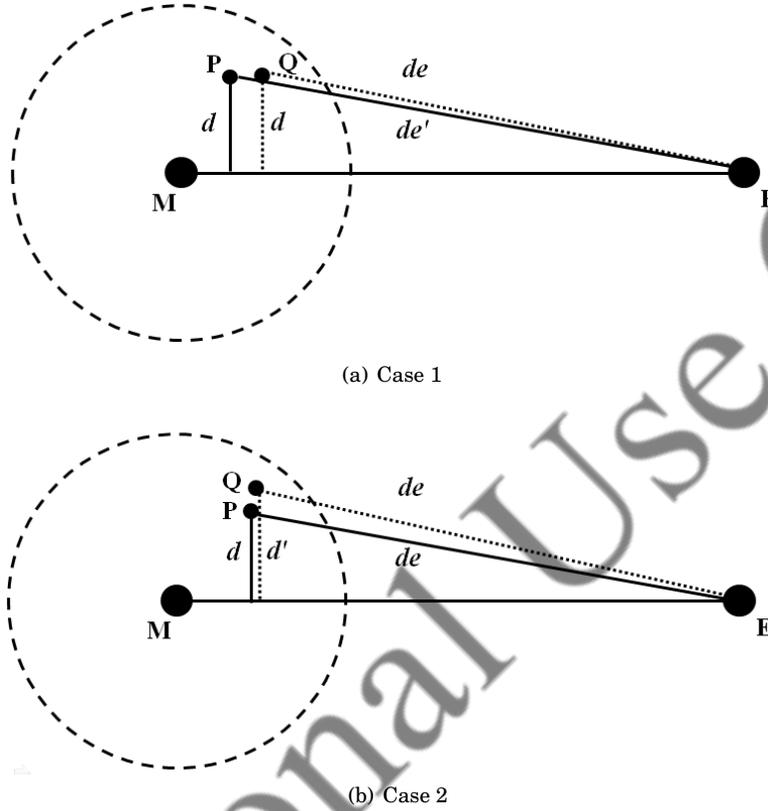


Fig. 3. Two cases for node selection based on distances

it is important to find a node for activation which is optimized with respect to certain specified parameters. Energy is an essential resource for communication in WSNs. So, it needs to choose such a node to be activated, which has substantial residual energy. The residual energy of a node  $n_i$  is represented by  $RE_i$ . We activate less number of intermediate nodes between the START and END nodes to choose reliable connectivity with less energy consumption. For activating less number of nodes, another parameter, effective distance  $D_i$ , is considered, which is the summation of  $d_i$  and  $de_i$ . In wireless communication, the receive signal strength (RSS) plays an important role for maintaining quality of service (QoS) of a link, i.e., the increase of RSS yields better link quality. Additionally, in this network, RSS is given extra attention because a node can become dumb due to environmental conditions which results in decrease in RSS. So, it is intended to choose a node having more RSS value. In this work, the RSS value of a node  $i$  is represented by  $RSS_i$ . The parameter  $D_i$  is characterized further in Lemma 4.1. As WSNs are energy constrained, it is better to choose a path between the START and the END nodes with less hop-count. Therefore, a parameter for hop-count  $HC$  is considered.

**LEMMA 4.1.** *To select optimal neighbor node to re-establish connectivity between the START and END nodes, the distances  $d$  and  $d_e$  must be considered, with fixed RSS and RE.*

**PROOF.** To prove this, we have considered two cases:

**Case 1:** The perpendicular distances ( $d'$ ) from two neighbor nodes P and Q to the straight line joining the START and the END nodes are equal, but the distances ( $d_e$  and  $d_e'$ ) from P and Q to the END node are unequal, as shown in Fig. 3(a).

**Case 2:** The perpendicular distances ( $d$  and  $d'$ ) from two neighbor nodes P and Q to the straight line joining the START and the END node are unequal, but the distances ( $d_e$ ) from P and Q to the END node are equal, as shown in Fig. 3(b).

If we draw a straight line between two disconnected nodes, it represents the minimum distance between them. So, it is imperative to choose a node located on the least distance from the straight line between two disconnected nodes. The perpendicular distance from a neighbor node and the straight line is represented by  $d$ . Again, the distance  $d_e$  between a neighbor node and the END node is also an important parameter, because if a node with least  $d_e$  is chosen, then it will result in faster progress toward the END node. In Case 1,  $d_e' > d_e$ ; so, node Q should be chosen. In Case 2,  $d' > d$ ; so, node P should be chosen. From these it can be inferred that both the parameters  $d$  and  $d_e$  are important. For giving equal importance to both the parameters, we choose a neighbor node with the least  $D$ , where  $D = d + d_e$ . Therefore, it is prudent to assign higher preference to select a neighbor node with minimum  $D$  to re-establish connectivity between the START and the END nodes.  $\square$

Each node has a unique ID. Fig. 4 represents the overall connectivity re-establishment process performed in a WSN with the help of CoRD. In this figure, Nodes 1 and 13 (START and END nodes) denote the activated nodes. The rest of the nodes are in sleep mode. Node 1 establishes connectivity with Node 13, which were connected earlier but ceased to be connected due to the onset of adverse environmental conditions. The connectivity re-establishment process is initiated by Node 1, which activates the intermediate sleep nodes in order to re-establish reliable connectivity with Node 13. A node which activates the neighbor nodes and brings them to participate in the connectivity re-establishment process is referred to as the MASTER node. Initially, the START node acts as the MASTER node. A MASTER node broadcasts an ACT (activation) message to activate the sleep nodes, which are in its reduced communication range. The packet format of an ACT message is shown in Fig. 5(c). When the communication range of Node 1 is decreases below  $d_{min}$ , it fails to communicate with any of its neighbor nodes, and becomes isolated from the network. Nodes 4, 5, and 9 are the sleep nodes within the reduced communication range  $r_c$  of the MASTER node, i.e., Node 1. It acts as a MASTER node, and starts to broadcast an ACT message, which activates the Nodes 4, 5, and 9. After activation of these nodes, Node 1 starts to broadcast REQ (request) packets to these nodes. A REQ packet contains seven fields namely SRT\_ID, SRT\_POS, MST\_ADDR, END\_ID, END\_POS, BNF\_VAL, and HC. These fields are the start node id, start position, master address, end node id, position of end node, cumulative benefit value, and hop-count, respectively. The request packet format is shown in Fig. 5(a). A neighbor node calculates the distance from the line between the START and the END nodes to itself, by using simple geometric method, as explained below

Let the positions of the START and the END nodes be denoted by  $(x_s, y_s)$ , and  $(x_e, y_e)$ , respectively. Let the position of the  $i^{th}$  neighbor node be  $(\alpha_i, \beta_i)$ . The equation of the straight line connecting the START and the END nodes is:

$$(y_e - y_s)x + (x_s - x_e)y + (x_e y_s - x_s y_e) = 0 \quad (12)$$

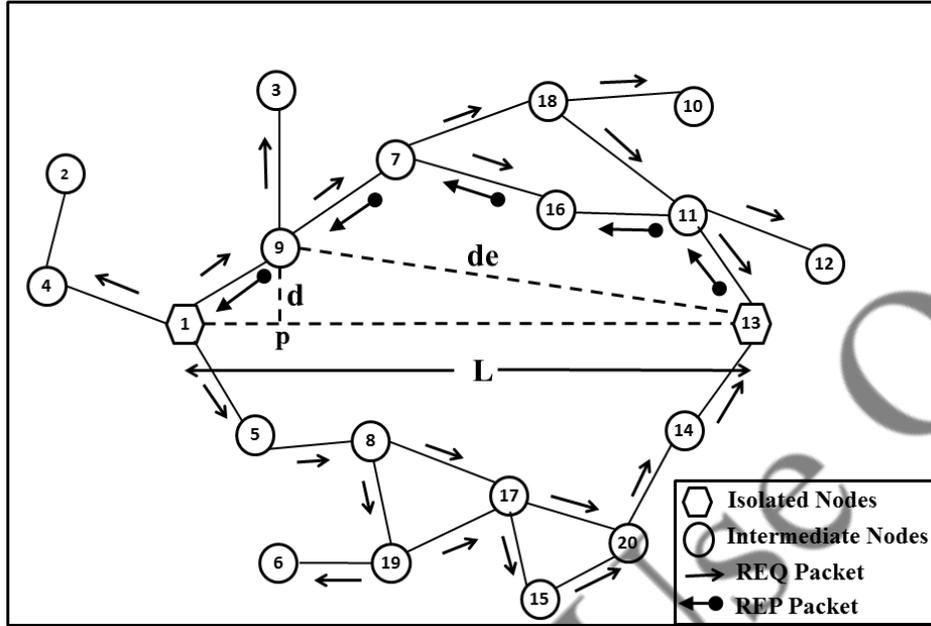


Fig. 4. Example Scenario

From Equation (12), the distance  $d_i$  from the neighbor node  $(\alpha, \beta)$  to the line between the START and the END nodes is:

$$d_i = \frac{|(y_e - y_s)\alpha - (x_e - x_s)\beta + (x_e y_s - x_s y_e)|}{\sqrt{(y_e - y_s)^2 + (x_s - x_e)^2}} \quad (13)$$

Likewise, the neighbor node calculates the Euclidean distance from the END node to itself, using the following equation:

$$de_i = \sqrt{(x_e - \alpha_i)^2 + (y_e - \beta_i)^2} \quad (14)$$

SRT_ID (2 bytes)	SRT_POS (4 bytes)	MST_ADDR (4 bytes)	END_ID (2 bytes)	END_POS (4 bytes)	BNF_VAL (2 bytes)	HC (2 bytes)
---------------------	----------------------	-----------------------	---------------------	----------------------	----------------------	-----------------

(a) Request Packet

END_ID (2 bytes)	END_ADDR (4 bytes)	SRT_ID (2 bytes)	SRT_ADDR (4 bytes)	MST_ID (2 bytes)	BROADCAST_ADDR (4 bytes)
---------------------	-----------------------	---------------------	-----------------------	---------------------	-----------------------------

(b) Reply Packet

(c) Activation Packet

Fig. 5. Request, Reply, and Activation Packets

## 5. PROPOSED SOLUTION

### 5.1. Path Exploration

A WSN can be modeled as a graph  $G(V, E)$ . Here, every node  $n_i \in V$  and links between nodes is  $l_{ij} \in E$ , where  $l_{ij}$  is the link between nodes  $n_i$  and  $n_j$ . Each node  $n_i$  has a benefit  $b_i$  which, depends on  $RE$ ,  $RSS$ ,  $D$ , and  $HC$ , for participation in establishing

connectivity between the START and the END nodes. These parameters are used in our solution to choose a node for participating in the connectivity procedure. In the network, there are three different type of nodes: START node  $n_s$ , END node  $n_e$ , and intermediate sleep nodes ( $n_i \in V \setminus \{n_s, n_e\}$ ) that can participate to establish the connectivity between the START and the END nodes. Each node  $n_i$  calculates its benefit  $b_i$  as follows:

$$b_i = (w_i - C_i) \quad (15)$$

where,  $b_i$ ,  $w_i$ , and  $C_i$  represent the benefit, worth, and cost functions, respectively, which are defined in Equations (27), (19), and (24), respectively.

#### A Price-based Scheme

The network is modeled as a price-based system in order to give importance to residual energy and received signal strength of a sensor node. We choose the price-based approach over game theoretic approach for the perceived simplicity of execution. However, game theoretic approaches may also be used alternatively. Additionally, we emphasize on hop-count required for re-establishing connectivity among the sensor nodes. Using price-based approach, we quantify the profit of each dumb node based on these parameters. Therefore, in our proposed algorithm, profit is calculated by subtracting loss from gain. Here, benefit (profit) of selecting a node for path re-establishment is calculated by subtracting the cost from the worth of selecting the node. Here, worth is the quantized value of advantages (gain) of selecting the node and cost is the quantized value of disadvantage (loss) of selecting the node. Each activated node participates in the re-connectivity procedure between two disconnected nodes.

We have modeled worth  $w_i$  for each node  $n_i$  considering the parameters  $RE_i$ , and  $RSS_i$ , such that,

$$w_i = f_1(RE_i) + f_2(RSS_i) \quad (16)$$

$$f_1(RE_i) = \left( \frac{RE_i}{RE_{max}} \right) \quad (17)$$

$$f_2(RSS_i) = \left( \frac{RSS_i}{RSS_{max}} \right) \quad (18)$$

Replacing Equation (16) by the values of Equations (17) and (18), we get:

$$w_i = \left( \frac{RE_i}{RE_{max}} \right) + \left( \frac{RSS_i}{RSS_{max}} \right) \quad (19)$$

$D_i$  is calculated as follows:

$$D_i = de_i + d_i \quad (20)$$

Considering the parameters  $D_i$  and  $HC_i$ , the cost function  $C_i$  of each node  $n_i$  is as follows:

$$C_i = g(D_i) + h(HC_i) \quad (21)$$

$$g(D_i) = \left( \frac{D_i}{L} \right) \quad (22)$$

$$h(HC_i) = \left( \frac{HC_i}{HC_{max}} \right) \quad (23)$$

where,  $HC_{max}$  is the maximum hop-cont between the START and the END nodes.

$$C_i = \left( \frac{D_i}{L} \right) + \left( \frac{HC_i}{HC_{max}} \right) \quad (24)$$

By replacing the values of Equations (19) and (24) into Equation (15), the benefit  $b_i$  of a node  $n_i$  is computed as:

$$b_i = \left[ \left( \frac{RE_i}{RE_{max}} + \frac{RSS_i}{RSS_{max}} \right) - \left( \frac{D_i}{L} + \frac{HC_i}{HC_{max}} \right) \right] \quad (25)$$

A node  $n_i$  is chosen depending upon another selection parameter  $\eta_i$ , as follows:

$$\eta_i = \begin{cases} 1, & RE_{th} \leq RE_i \leq RE_{max} \wedge RSS_{th} \leq RSS_i \leq \\ & RSS_{max} \wedge 0 \leq de_i \leq L \\ 0, & \text{otherwise} \end{cases} \quad (26)$$

where,  $RE_{th}$  is the minimum threshold of  $RE$  above which a node  $n_i$  can communicate with other nodes, and  $RSS_{th}$  is the minimum threshold of  $RSS$  for the same. The resulting benefit function is as follows:

$$b_i = \eta_i \left[ \left( \frac{RE_i}{RE_{max}} + \frac{RSS_i}{RSS_{max}} \right) - \left( \frac{D_i}{L} + \frac{HC_i}{HC_{max}} \right) \right] \quad (27)$$

**LEMMA 5.1.** *Let the distance between the START and the END nodes be  $L$ . Then, the maximum effective distance  $D_{max}$  is  $2L$ .*

**PROOF.** Let S be the MASTER node, which chooses a neighbor node. The neighbor node gives the maximum value of  $D$ , when both  $d$  and  $de$  are maximum. This condition arises when a node is located at A or A', as shown in Fig. 6. At this position,  $de = d = L$ . Therefore,  $D_{max} = d + de = 2L$   $\square$

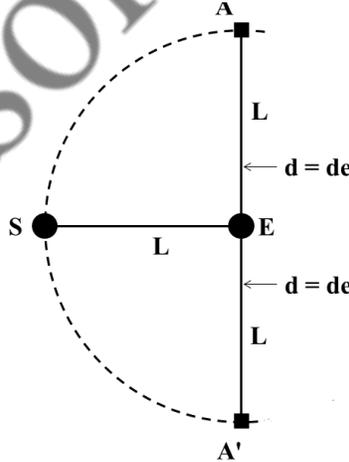


Fig. 6. Maximum value of cost function

**THEOREM 5.2.** *The maximum and minimum values of the benefit function with total  $N$  number of nodes in the network in Equation (27) are:*

$$b_i^{max} = 2 - \frac{1}{N-2}$$

$$b_i^{min} = \frac{RE_{th}}{RE_{max}} + \frac{RSS_{th}}{RSS_{max}} - 3$$

when,  $RE_{th} \leq RE_i \leq RE_{max}$ ,  $RSS_{th} \leq RSS_i \leq RSS_{max}$ , and  $0 \leq de_i \leq L$ .

**PROOF.** The benefit function  $b_i$ , is a linear function of four variables  $RE_i$ ,  $RSS_i$ ,  $D_i$ , and  $HC$ , and  $\eta$  is a constant for choosing a node as mentioned in equation 26. The function is derived by subtracting the cost function from the worth function shown in Equations (19) and (24). The benefit function in Equation (27) gives the maximum value, when worth is maximum and the cost is minimum. The benefit is maximum when  $RE_i = RE_{max}$  and  $RSS_i = RSS_{max}$ . So, the maximum worth value is:

$$w_i^{max} = \frac{RE_{max}}{RE_{max}} + \frac{RSS_{max}}{RSS_{max}} = 2. \quad (28)$$

The cost function is minimum when the values of  $g(D_i)$  and  $h(HC_i)$  are minimum.

The minimum value of  $D_i$  is 0, and it is possible only when the END node acts as the MASTER node. When the END node acts as the MASTER node,  $d_i$  and  $de_i$  result in the value 0. So, the minimum value of  $g(D_i)$  is 0.

The minimum value of  $HC_i$  is 1. When the START node forwards the process of re-establishment of connectivity, the value of  $HC$  becomes 1. So, the minimum value of  $h(HC_i)$  is  $\frac{1}{N-2}$ . So, the minimum cost becomes:

$$C_i^{max} = 0 + \frac{1}{(N-2)} \quad (29)$$

From Equations (28) and (29), the maximum benefit value of function in Equation (27) is:

$$b_i^{max} = 2 - \frac{1}{(N-2)}$$

Again, for the minimum value of the benefit function, worth is minimum and cost is maximum. Worth is minimum when  $RE_i = RE_{th}$ ,  $RSS_i = RSS_{th}$ . The minimum worth value is:

$$w_i^{min} = \frac{RE_{th}}{RE_{max}} + \frac{RSS_{th}}{RSS_{max}} \quad (30)$$

The value of the cost function becomes maximum when  $g(D)$  and  $h(HC)$  both are maximum.

From Lemma 5.1, we have the maximum value of  $g(D)$  and  $h(HC)$ , when the value of  $HC$  is  $HC_{max}$ , i.e.,  $h(HC) = 1$ . So, the maximum cost value

$$C_i^{max} = 3 \quad (31)$$

From Equations (30) and (31), the minimum value of the benefit function is:

$$b_i^{min} = \left( \frac{RE_{th}}{RE_{max}} + \frac{RSS_{th}}{RSS_{max}} \right) - 3$$

□

**LEMMA 5.3.** *The benefit function in Equation (27) is continuous in the intervals  $RE_{th} \leq RE_i \leq RE_{max}$ ,  $RSS_{th} \leq RSS_i \leq RSS_{max}$ ,  $0 \leq D \leq 2L$ , and  $0 \leq HC \leq (N-2)$ .*

PROOF. The given benefit function in Equation (27) is:

$$b_i = \eta_i \left[ \left( \frac{RE_i}{RE_{max}} + \frac{RSS_i}{RSS_{max}} \right) - \left( \frac{D_i}{L} + \frac{HC_i}{HC_{max}} \right) \right] \quad (32)$$

where  $\eta_i$  is a constant.

Let  $y = f(x, y)$  be a multi-variable function which is continuous at point  $(x_0, y_0)$ , if the following condition satisfies.

$$\forall \epsilon > 0 \exists \delta(\epsilon) > 0 \text{ such that } |x - x_0| < \delta, |y - y_0| < \delta \implies |f(x, y) - f(x_0, y_0)| < \epsilon \quad (33)$$

Therefore, the benefit function is continuous at any point  $(RE_0, RSS_0, D_0, HC_0)$ . Whenever  $|RE_i - RE_0| < \delta$ ,  $|RSS_i - RSS_0| < \delta$ ,  $|D_i - D_0| < \delta$ , and  $|HC_i - HC_0| < \delta$ , then,  $|f(RE_i, RSS_i, D_i, HC_i) - f(RE_0, RSS_0, D_0, HC_0)| < \epsilon$ , where,  $\delta$  and  $\epsilon$  are positive constants. Also,  $\eta_i$  is a positive constant in the interval of  $RE_{th} \leq RE_0 \leq RE_{max}$ ,  $RSS_{th} \leq RSS_0 \leq RSS_{max}$ ,  $0 \leq D_0 \leq 2L$ ,  $1 \leq HC_0 \leq HC_{max}$

Therefore,

$$\begin{aligned} |b_i - b_0| &= \left| \left\{ \left( \frac{RE_i}{RE_{max}} + \frac{RSS_i}{RSS_{max}} \right) - \left( \frac{D_i}{2L} + \frac{HC_i}{HC_{max}} \right) \right\} - \left\{ \left( \frac{RE_0}{RE_{max}} + \frac{RSS_0}{RSS_{max}} \right) - \left( \frac{D_0}{2L} + \frac{HC_0}{HC_{max}} \right) \right\} \right| \\ &\leq \left| \frac{1}{RE_{max}} \right| |RE_i - RE_0| + \left| \frac{1}{RSS_{max}} \right| |RSS_i - RSS_0| - \left| \frac{1}{L} \right| |D_i - D_0| \\ &= \left( \frac{\delta}{RE_{max}} + \frac{\delta}{RSS_{max}} \right) - \left( \frac{\delta}{2L} + \frac{\delta}{HC_{max}} \right) \\ &= \epsilon \end{aligned}$$

Therefore,

$$\delta = \frac{\epsilon}{\kappa} \quad (34)$$

where,

$$\kappa = \left( \frac{1}{RE_{max}} + \frac{1}{RSS_{max}} \right) - \left( \frac{1}{2L} + \frac{1}{HC_{max}} \right) \quad (35)$$

In Equation (35),  $\eta_i$ ,  $RE_{max}$ ,  $RSS_{max}$ ,  $L$ , and  $HC_{max}$  are positive constants and  $\left( \frac{1}{RE_{max}} + \frac{1}{RSS_{max}} \right) \geq \left( \frac{1}{2L} + \frac{1}{HC_{max}} \right)$ . Hence,  $\kappa$  is a positive constant, such that  $\kappa \neq 0$ . Equation (34), signifies for every  $\epsilon \geq 0$  there is a  $\delta \geq 0$ . So, the given benefit function in Equation (27) is continuous.

□

At the beginning of the process, the START node acts as the MASTER node. The cumulative benefit  $B_i^C$  is initialized as 0, and hop-count  $HC$  is initialized with 1. The MASTER node activates all its neighbor nodes and sends the request packet  $REQ$  to them. The activated neighbor nodes (with  $\eta_i = 1$ ) calculate their own benefit values  $b_i$ , and add with it the  $B_i^C$  values received from the MASTER node, whereas the neighbor nodes  $\eta_i = 0$  go to the sleep state.

These activated neighbor nodes hold the address of the previous MASTER node whose  $B_i^C$  value is maximum, increases the  $HC$  by 1, and acts as the MASTER node, in order to process the same in the next hops. A MASTER node remains activated for  $t_{reply}$  time, where  $t_{reply}$  is the expected time for receiving the  $REP$  packet from the END node. If a neighbor node receives  $REQ$  packets from multiple MASTER nodes, it chooses one based on the highest value of  $B_i^C$ . Each intermediate node  $n_i$  calculates its

$B_i^C$  value as follows:

$$B_i^C = b_i + \sum_{j=1}^{i-1} b_j \quad (36)$$

## 5.2. Path Selection

Algorithm 1 presents the procedure for exploring the path from the START to the END nodes. In the path exploration procedure, if an intermediate node between the START and the END nodes satisfies the condition of  $\eta$ , it selects a downstream node towards START node, based on the highest cumulative benefit value  $B_i^C$ . Thereafter, this intermediate node acts as a MASTER node and the scheme, *CoRD*, continues its execution in the upstream nodes (nodes towards END node). The scheme continues

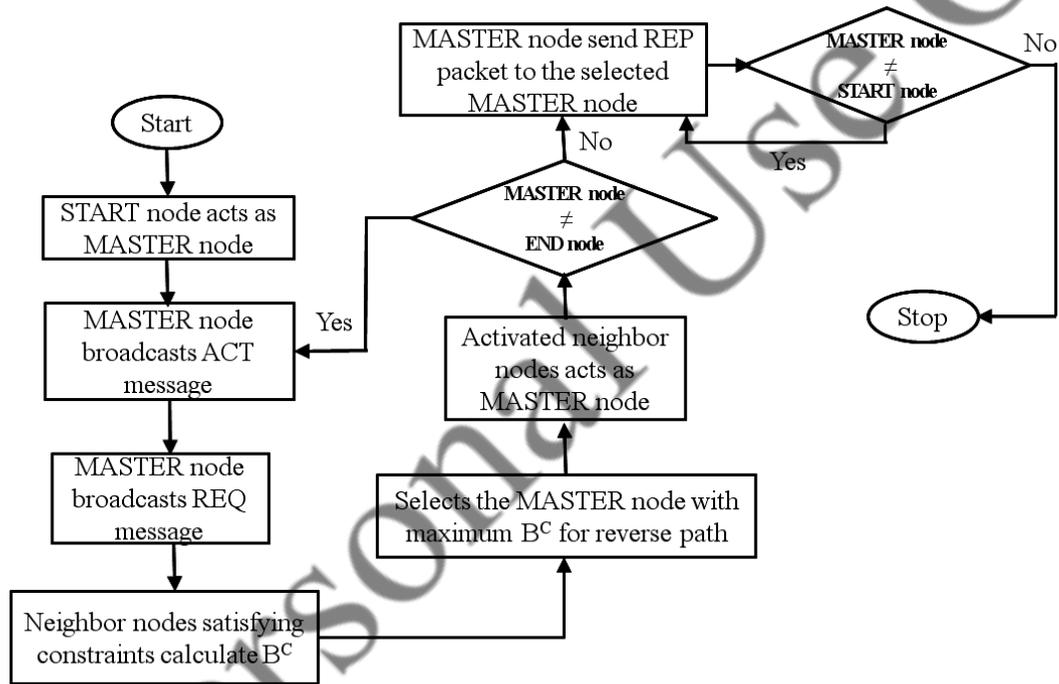


Fig. 7. Path exploration and selection

until reaches the END node. Finally END node acts as the MASTER node and chooses a downstream node with highest benefit value  $B_i^C$ . The END node sends the *REP* packet to the START node through the selected downstream node. The flow diagram of the connectivity re-establishment procedure is shown in Fig. 7.

**Proposition 2.** *The best case computational complexity of CoRD is  $O(n)$ , when  $n$  is the given set of intermediate nodes between the START and the END.*

**PROOF.** *CoRD* is divided into two parts, namely *path exploration* and *path selection*. For *path exploration*, the best possible path to reach the END node is chosen so that each intermediate node participating in *CoRD* has at most one neighbor node towards the END node. The total number of intermediate nodes between the START and the

**Algorithm 1** Path Exploration**Require:**

- $SRT\_ID$ : id of START node
- $END\_ID$ : id of END node
- $(x_s, y_s)$ : position of START node
- $(x_e, y_e)$ : position of END node
- $t_{reply}$ : expected reply time from END node
- $t_{repeat}$ : repeat time

```

1: if ( $ID = SRT\_ID$ ) then
2:    $(x_m, y_m) \leftarrow (x_s, y_s)$ 
3:    $B^C \leftarrow 0$ 
4:    $HC \leftarrow 0$ 
5: end if
6: if ( $ID \neq END\_ID$ ) && (received  $REQ$ ) then
7:    $(\alpha, \beta) \leftarrow$  node position
8:    $L \leftarrow \sqrt{(x_e - x_s)^2 + (y_e - y_s)^2}$ 
9:    $D \leftarrow d + de$ 
10:   $RE \leftarrow$  Residual Energy of node
11:   $RSS \leftarrow$  Received Signal Strength of node
12:  if ( $(RE_{th} \leq RE_i \leq RE_{max}) \ \&\& \ (RSS_{th} \leq RSS_i \leq RSS_{max})$ 
13:    && ( $0 < de \leq L$ )) then
14:     $b \leftarrow \left[ \left( \frac{RE}{RE_{max}} + \frac{RSS_i}{RSS_{max}} \right) - \left( \frac{D}{L} + \frac{HC}{HC_{max}} \right) \right]$ 
15:    if ( $ID \neq SRT\_ID$ ) then
16:       $B^C \leftarrow BNF\_VAL + b$ 
17:      if (Number of  $REQ$  received with same  $SRT\_ID > 1$ ) then
18:         $node\_buffer \leftarrow MST\_ADDR$  with  $max(B^C)$ 
19:         $BNF\_VAL \leftarrow max(B^F)$ 
20:      end if
21:      if (Number of  $REQ$  received with same  $SRT\_ID = 1$ ) then
22:         $node\_buffer \leftarrow MST\_ADDR$ 
23:      end if
24:       $HC \leftarrow HC + 1$ 
25:    end if
26:     $(x_m, y_m) \leftarrow (\alpha, \beta)$ 
27:    Activate node for next  $t_{reply}$  time
28:    node broadcast ACT message followed by  $REQ$  message
29:  end if
30: end if
31: if ( $(!timeout(t_{reply})) \ \&\& \ (received \ REP)$ 
32:  && ( $MST\_ID \neq SRT\_ID$ )) then
33:   $MST\_ADDR \leftarrow$   $MST\_ADDR$  from the  $node\_buffer$ 
34:  forward  $REP$  to  $MST\_ADDR$ 
35:  Activate node for next  $t_{repeat}$  time
36: end if

```

END nodes is  $n$ . Time taken to explore the intermediate next node is constant  $C$ . Thus, the recurrence can be modeled as  $T(n) = T(n - 1) + \Theta(C) \simeq O(n)$

Similarly, for *path selection*, the return path consists of the same set of nodes in the opposite direction. Thus, the computational complexity for path selection is  $O(n)$ . Hence, the complexity of *CoRD* is  $O(n) + O(n) \simeq O(n)$   $\square$

**Proposition 3.** *The worst case asymptotic time complexity of CoRD in a  $d$ -ary tree topological network is  $O(d^p + \mathcal{L}(END))$ , where  $\mathcal{L}$  indicates the level of a node and  $p$  the path length.*

**PROOF.** The worst case complexity occurs when every possible path, involving every node of the network, is explored. In such a case, the START node becomes the root of the topology, and the END node turns out to be one of the leaves. For a  $d$ -ary tree

**Algorithm 2** Path Selection**Require:**

—  $master\_add[ ]$ : list of addresses of master nodes  
 —  $bnf\_val[ ]$ : list of utility values  
 —  $hc[ ]$ : list of hop-count

```

1: if ((MST.ID = END.ID) && (received REQ)) then
2:    $bnf\_val[ ] \leftarrow$  BNF_VAL from REQ packets
3:   for  $i$  do 1 to  $bnf\_val.length$ 
4:      $master\_add[i] \leftarrow$  MST_ADDR
5:   end for
6:   if Number of REQ received > 1 then
7:     MST_ADDR  $\leftarrow$   $master\_add$  with  $max(bnf\_val)$ 
8:   else
9:     MST_ADDR  $\leftarrow$   $master\_add$ 
10:  end if
11:  send REP to MST_ADDR
12: end if

```

topology of the network, the path exploration procedure of the tree essentially implies a Breadth First Search (BFS) from the START node to the END node. Therefore, the longest path  $p$  from the START to the END node is  $\mathcal{L}(END)$ . Hence, the asymptotic worst case computational complexity for path exploration is  $O(d^p)$ , where  $d$  can be also viewed as the branching factor of the tree.

For the path selection procedure, the REQ packet backtracks from the END node through the previous MASTER node of every level, down to the START node. In such a scenario, the worst case computational complexity becomes  $O(\mathcal{L}(END))$ .

Hence, we infer that the total computational complexity of CoRD, in the worst case, is  $O(d^p + \mathcal{L}(END))$ . This completes the proof.  $\square$

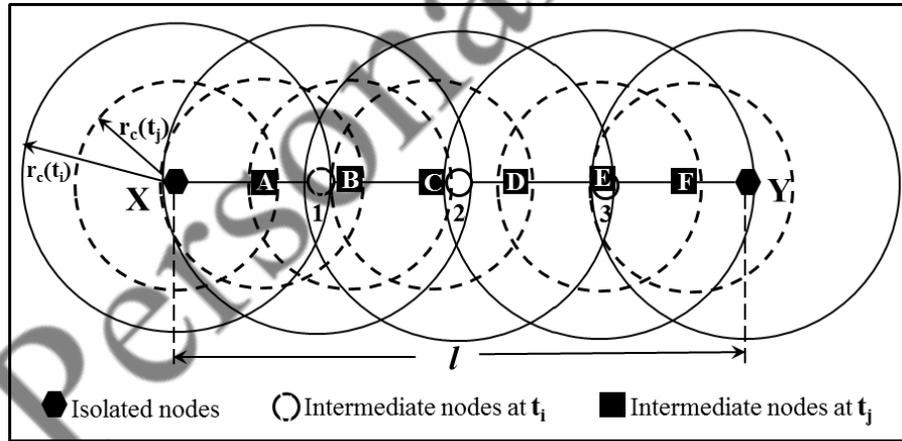


Fig. 8. Nodes require to activate during two different intensity of environmental effect

**THEOREM 5.4.** *The minimum number of iterations required for establishing connectivity between a pair of disconnected nodes increases (decreases) with the increase (decrease) in intensity of environmental effects.*

**PROOF.** Let the communication range of any node X be  $r_c$ , and let the distance between another node Y and itself be  $l$ . A minimum number of nodes  $N_{min}$  needs to be

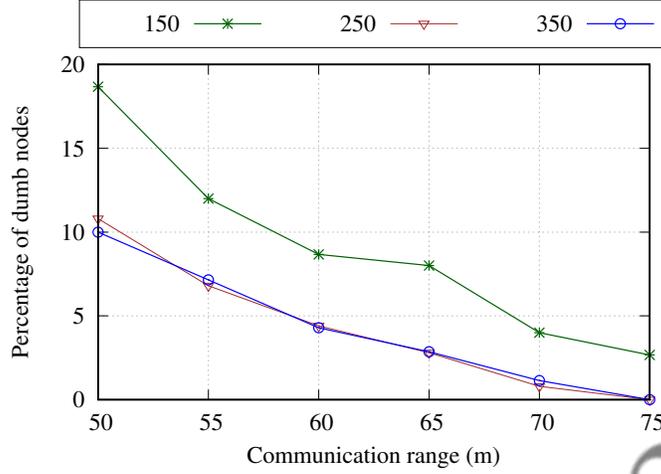


Fig. 9. Percentage of dumb nodes with fixed communication range

activated between these two nodes X and Y for establishing connection. The number of activated nodes is minimum, if and only if each activated node lies on the straight line connecting these two nodes, and on the circumference of one another, as shown in Fig. 8. When the communication range is  $r_c$ , minimum number of nodes required to be activated is:

$$N_{min} = \left\lceil \frac{l}{r_c} \right\rceil - 1 \quad (37)$$

Due to environmental effects, at time  $t_i$ , the communication range is reduces by  $\Delta r_c(t_i)$ , and the new communication range  $r_c(t_i) = r_c - \Delta r_c(t_i)$ . To establish connectivity between X and Y, Nodes 1, 2, and 3 are required to be activated. Now, the minimum number of nodes required to activate at time  $t_i$

$$N_{min}(t_i) = \left\lceil \frac{l}{r_c(t_i)} \right\rceil - 1 \quad (38)$$

Therefore, at time  $t_i$ , minimum  $N_{min}(t_i)$  number of iterations is required for establishing connectivity between the nodes X and Y.

At time instant  $t_j$ , due to increased intensity of environmental effects, let the decrease in communication range be  $\Delta r_c(t_j)$ , such that  $\Delta r_c(t_j) > \Delta r_c(t_i)$ . The reduced communication radius of each node is  $r_c(t_j) = r_c - \Delta r_c(t_j)$ , and the minimum number of nodes  $N_{min}(t_j)$  required to be activated between two nodes for re-establishment of connectivity is:

$$N_{min}(t_j) = \left\lceil \frac{l}{r_c(t_j)} \right\rceil - 1 \quad (39)$$

So, at time  $t_j$ , minimum  $N_{min}(t_j)$  iterations are required for establishing connectivity between X and Y nodes. From Equations (38) and (39),  $N_{min}(t_j) > N_{min}(t_i)$ , as  $\Delta r_c(t_j) > \Delta r_c(t_i)$ . Hence, it is proved that the minimum number of iterations required for re-establishing connectivity between two nodes increases (decreases) with the increase (decrease) in intensity of environmental effects.  $\square$

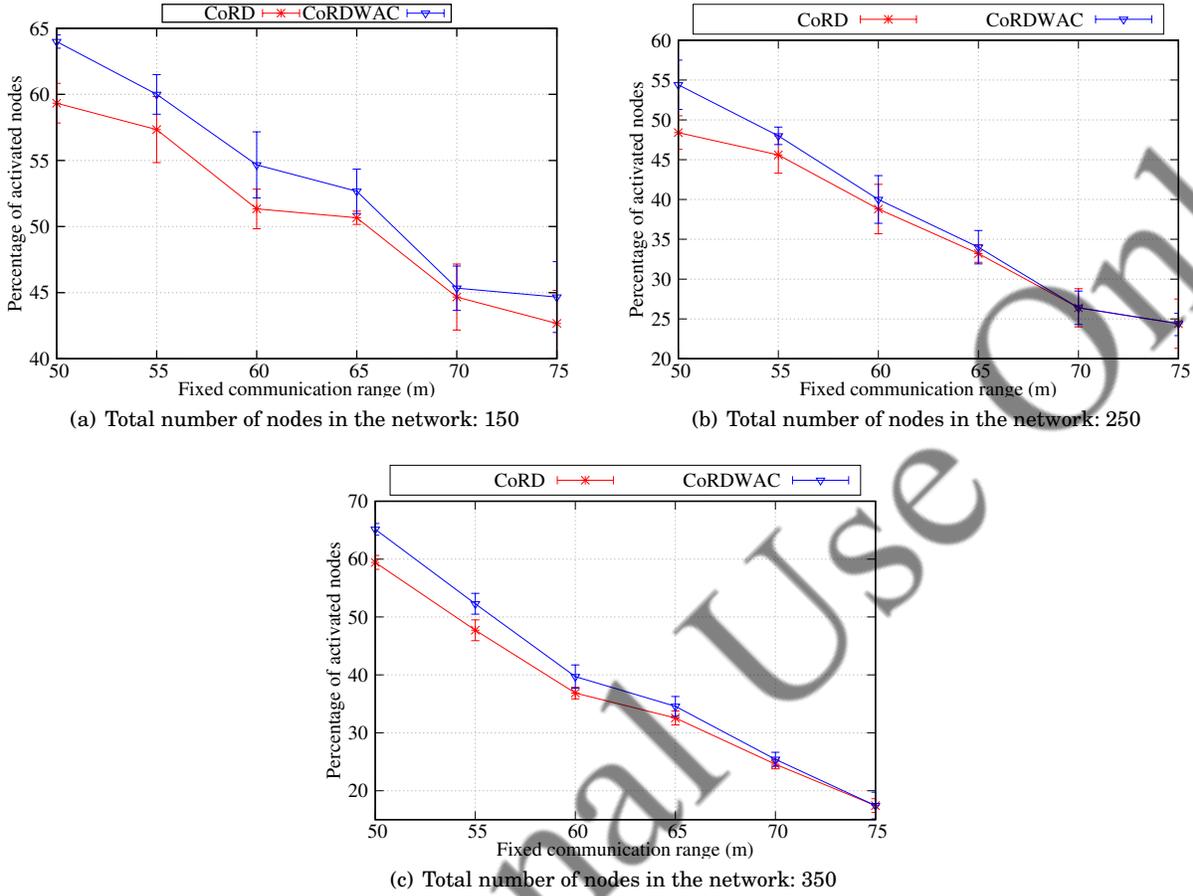


Fig. 10. Percentage of activated nodes with fixed communication range

**THEOREM 5.5.** *Connectivity between two isolated nodes cannot be re-established when the communication range of nodes become less than the minimum distance between any pair of nodes in the network.*

**PROOF.** A sensor node in a WSN behaves as dumb, when its communication range decreases below its nearest active neighbor node due to the change in various environmental phenomena such as fog, rainfall, and high temperature. Node  $n_i$  has distance with its nearest neighbor node  $d_{min}^i$  as,

$$d_{min}^i = \min(r_c^{ne_i}) \quad \forall ne_i$$

A node  $n_i$  starts to behave as dumb, when its communication range  $r_c^i < d_{min}^i$ , whereas the minimum distance among all pairs of nodes (including the sleep and active nodes)  $d_{min}^{all}$  is as follows:

$$d_{min}^{all} = \min(d_{min}^i) \quad i \in N, \text{ where } N \text{ is the set of all nodes in the network}$$

So,  $d_{min}^{all} \leq d_{min}^i$ . When the communication range  $r_c$  decreases below  $d_{min}^{all}$ , all the nodes in the network start to behave as dumb node. *CoRD* re-establishes multi-hop connectivity between two isolated nodes by activating the intermediate sleep nodes. If the

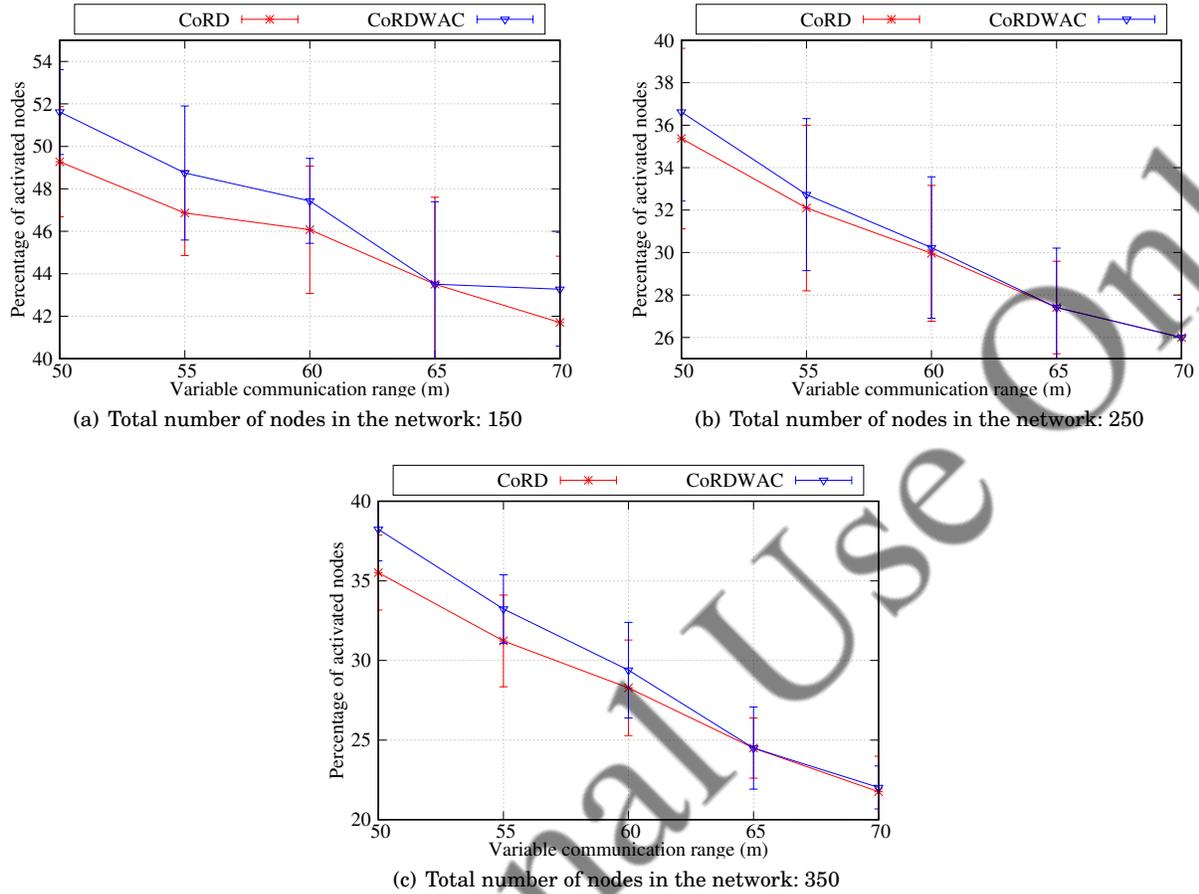



Fig. 11. Percentage of activated nodes with variable communication range

communication range of all the nodes decrease below the distance to their nearest neighbor (active and sleep) nodes, then these nodes are unable to find any neighbor node. Hence, there is no scope of activation of neighbor nodes for establishing multi-hop connectivity between two disconnected nodes. Therefore, connectivity re-establishment between isolated nodes is not possible.  $\square$


## 6. SIMULATION DESIGN

In this section, we evaluate the performance of the proposed algorithm, *CoRD*, which is designed to re-establish the connectivity between the START and the END node in a WSN. The concept of dumb node is new, and due to the change in network topology in their presence, the problem of re-establishing connectivity is distinct from the existing works (e.g. [Dini et al. 2008] and [Senel et al. 2011]). Therefore, it is difficult to compare with any existing topology control algorithm.


In regards *CoRD*, by applying the constraint  $\eta$  on the parameter  $de$ , we reduce the number of nodes to be activated in the network by considering the limited energy of WSNs, as well as the network congestion. Another scheme *Connectivity Re-establishment in the Presence of Dumb node Without Applying Constraint (CoRDWAC)* designed which is similar to *CoRD*, for re-establishing connectivity. The fundamental

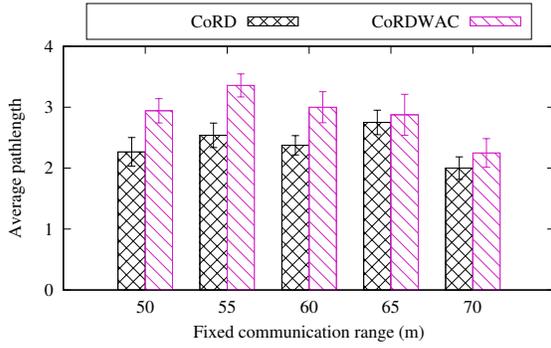

(a) Total number of nodes in the network: 150

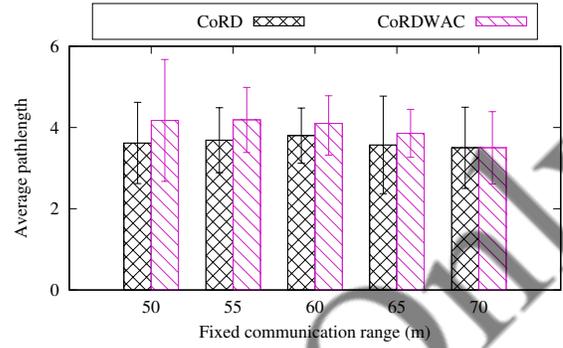

(b) Total number of nodes in the network: 250

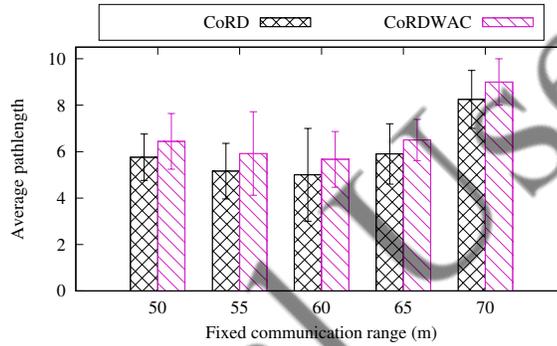

(c) Total number of nodes in the network: 350

Fig. 12. Average path length with fixed communication range

difference between *CoRD* and *CoRDWAC* is that in *CoRDWAC* there is no constraint on the parameter  $de$ , as in *CoRD* to choose its neighbor nodes. Therefore, in *CoRDWAC*, each node chooses and activates any of the neighbor nodes available within its communication range, without considering any constraint such as the constraint of distance, ( $de$ ). So, we have compared the results of *CoRD* with *CoRDWAC*, and other topology management protocols called *Learning automata-based Energy-efficient Topology Control (LECT)*[Torkestani 2013] and *Distributed Topology Control Algorithm(A1)*[Rizvi et al. 2012], with respect to the following performance parameters:


- *Percentage of activated nodes*: Total number of nodes to be activated in the network per 100 nodes required. It is represented by  $\mathcal{P}_A$ . Mathematically,

$$\mathcal{P}_A = \frac{a}{N} \times 100 \quad (40)$$


where  $a$  is number of activated nodes in the network and  $N$  is the total number of nodes in the network.

- *Success rate*: Ratio between the number of START nodes that can successfully establish connection with the END nodes and the total number of dumb nodes present in the network. Success rate is represented by  $S$ . Mathematically,


$$S = \frac{N_C}{I_N} \quad (41)$$

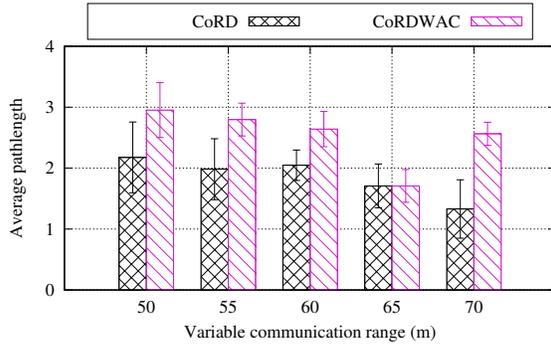

(a) Total number of nodes in the network: 150

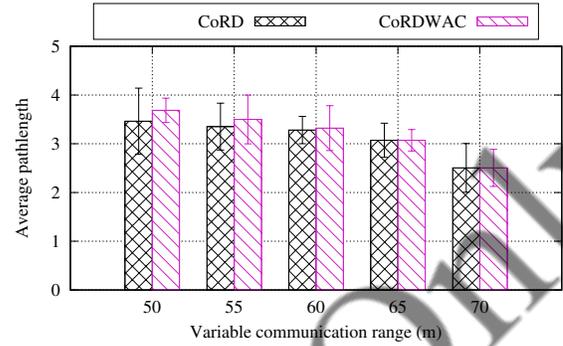

(b) Total number of nodes in the network: 250

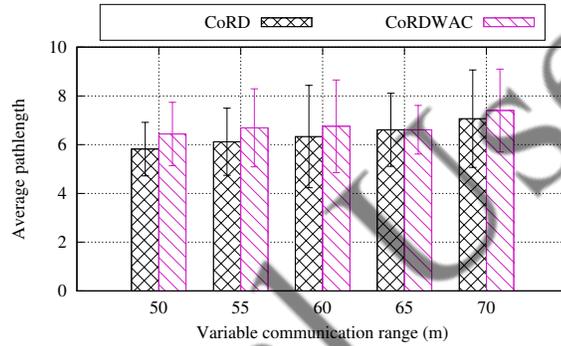

(c) Total number of nodes in the network: 350

Fig. 13. Average path length with variable communication range

where  $N_C$  is number of isolated nodes successfully established the connectivity in the network and  $I_N$  is the total number of isolated nodes in the network.

- *Average path length*: The ratio between the total number of links for establishing successful connectivity and the number of successfully connected pairs of START and the END nodes. Average pathlength is represented by  $\mathcal{A}$ . Mathematically,

$$\mathcal{A} = \frac{n_a}{N_C} + 1 \quad (42)$$

where  $n_a$  is number of nodes activate to re-establish the connectivity of the isolated nodes with the network.


- *Percentage of dumb nodes*: Total number of dumb nodes present per 100 nodes in the network. Percentage of dumb nodes is represented by  $\mathcal{P}_D$ . Mathematically,

$$\mathcal{P}_D = \frac{N_D}{N} \quad (43)$$


where  $N_D$  is the number of dumb nodes present in the network

- *Energy consumption*: Required energy to re-establish connectivity between the START and the END nodes in the network.
- *Overhead*: Total amount of control message required to re-establish connectivity between all the START and END nodes.


The list of simulation parameters used is shown in Table II.

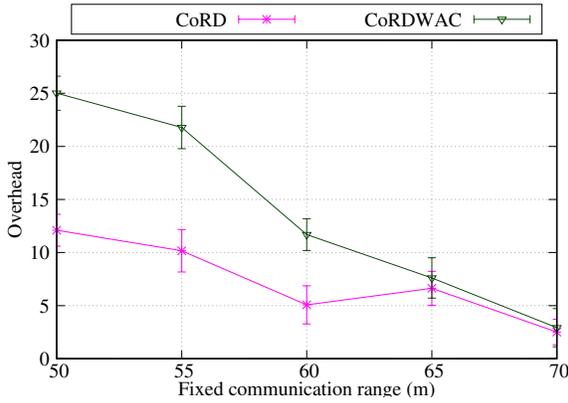

(a) Total number of nodes in the network: 150

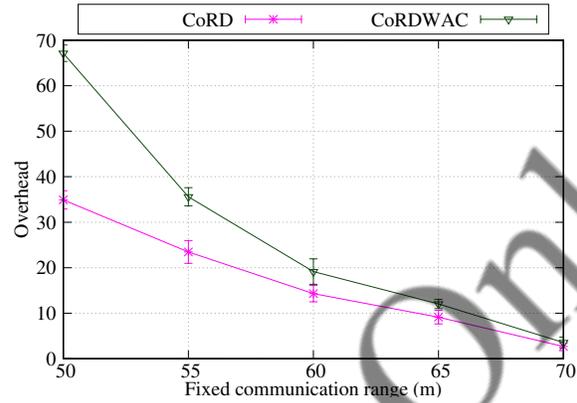

(b) Total number of nodes in the network: 250

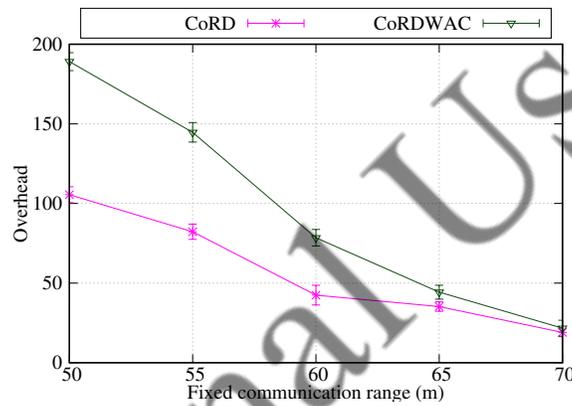

(c) Total number of nodes in the network: 350

Fig. 14. Overhead with fixed communication range

Table II. Simulation Parameters

Parameter	Value
Number of nodes	150-350
Simulation area	500 m × 500 m
Sensing range	50 m
Communication range	50-110 m
Initial Energy	1.5-2.0 J

We simulate the algorithm on stationary WSNs, with 150 - 350 sensor nodes, including a sink node deployed randomly over a simulation area 500m × 500m. Initially, a minimum set of nodes is required to be activated to cover the entire simulation area, while the remaining nodes are in the sleep state. We assume that all the sensor nodes are homogeneous. Hence, they have the same characteristics of sensing and communicating. The packet size for ACT, REQ, and REP are 6, 20, and 12 bytes, respectively, as shown in Fig. 5. The transmission or reception of data takes place at 50 nJ/bit. Initially, all the sensor nodes are assigned with energy level randomly drawn from an uniform distribution in the interval [1.5J, 2.0J]. Initially, we have taken the sensing range to be 50 m, and the communication range to be 110 m. For simulating the environmental effect on sensor nodes, the communication range of these nodes was randomly varied between 50-110 m.


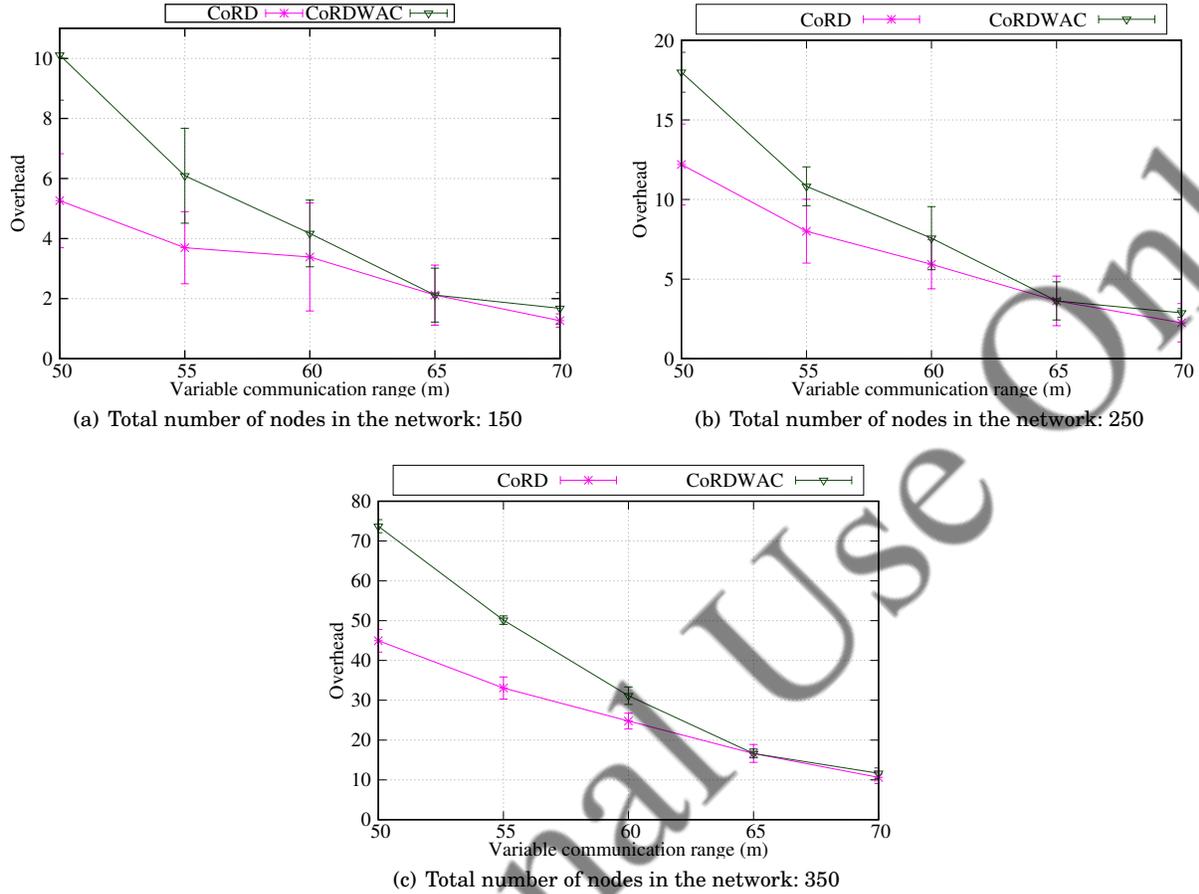


Fig. 15. Overhead with variable communication range


## 7. DISCUSSION OF RESULTS

Fig. 9 depicts the percentage of dumb nodes versus the communication range. Three scenarios are shown corresponding to 150, 250, and 350 nodes in the network. The communication range of each node is increased from 50 to 70m in steps of 5m. In each of the three plots, the percentage of dumb nodes decreases with the increase in the communication range.


Fig. 10 shows how the percentage of activated nodes using *CoRD* and *CoRDWAC* changes with the communication range in the presence of 150, 250 and 350 nodes in the network. When the communication range  $r_c$  is 50m, the percentage of activated nodes is maximum. The percentage of activated nodes decreases with the increase in communication range. The possible reason for degradation in the percentage of activated nodes is that with the increase in communication range, the percentage of dumb nodes decreases, so it is required to activate less number of nodes in higher communication range. There is a general decreasing trend of the plots for *CoRDWAC* when the communication range increases. This is similar to the plot of *CoRD*. However, the percentage of activated nodes in *CoRDWAC* is same or higher than that in *CoRD*. Because *CoRDWAC* re-connects more dumb nodes with the network than *CoRD*. Fig. 11 shows the percentage of activated nodes with varying communication range. The min-

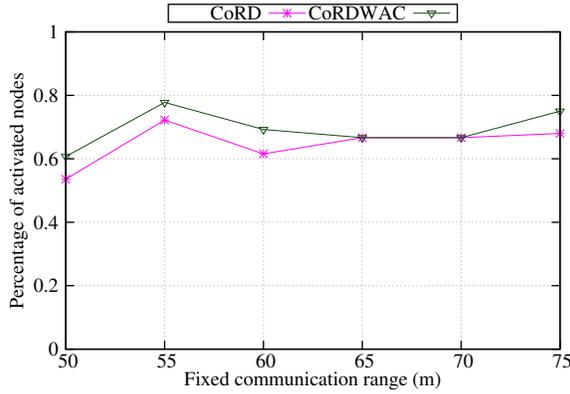

(a) Total number of nodes in the network: 150

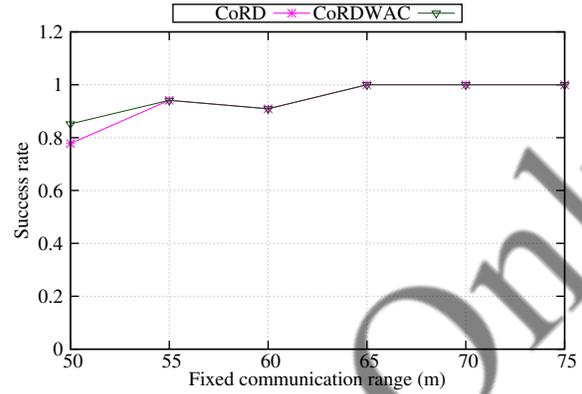

(b) Total number of nodes in the network: 250

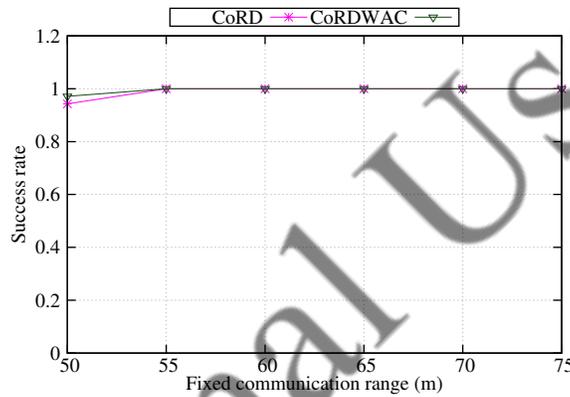


(c) Total number of nodes in the network: 350

Fig. 16. Success rate with fixed communication range


imum communication range along x-axis varies between 50 to 70m with an interval of 5m. The maximum range, however, is 110m (under ideal environmental condition) or less (in the presence of adverse environmental condition). Figs. 11(a), 11(b), 11(c) show the variations in the percentage of activated nodes by considering the total number of 150, 250, and 350 nodes, respectively. In each of the plots, we observe, that there is a general decreasing trend in the plot of both *CoRD* and *CoRDWAC* with increase in communication range. *CoRDWAC* activates more number of nodes as compare to *CoRD* as it re-establishes connectivity with more number of dumb nodes by exploring all possible paths in the network.

Fig. 12 shows the variation in the average path length versus fixed communication range along the x-axis, when the range varies between 50 to 70m with an interval of 5m. We observe that there is random variation of path length due to random topology of the network. The required path length for re-establishing connectivity between a pair of isolated nodes is largely dependent on the deployment of the nodes in the network. So, the variation in path length observed in each of the plots is random.


In Fig. 13, the plots are shown for the average path length versus variable communication range, which is considered to be the same as that mentioned for the experiments corresponding to Fig. 11. In this case as well we observe random variation of

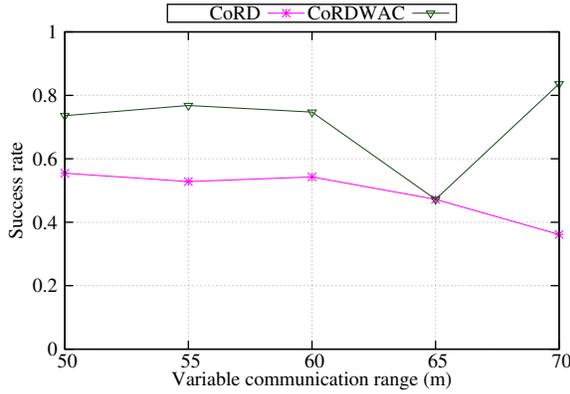

(a) Total number of nodes in the network: 150

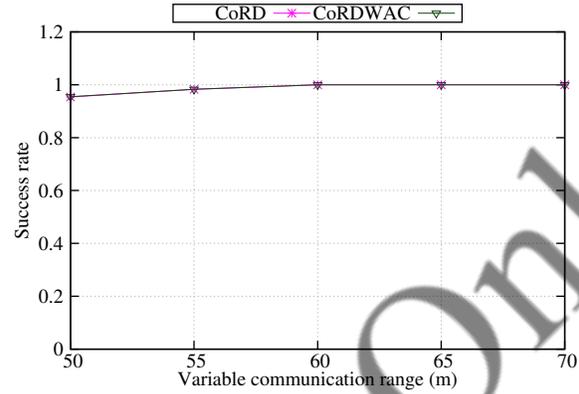

(b) Total number of nodes in the network: 250

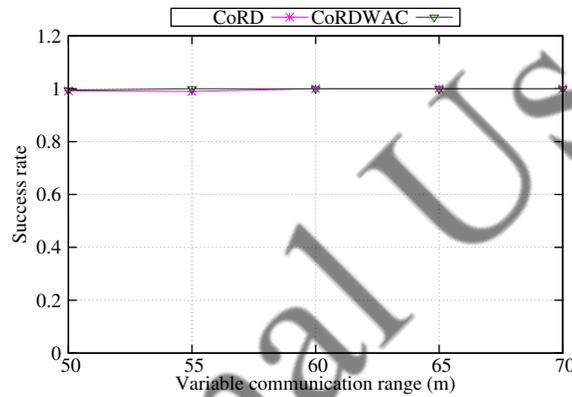

(c) Total number of nodes in the network: 350

Fig. 17. Success rate with variable communication range

path length for re-establishing the connectivity between a pair of disconnected nodes due to reasons similar to the ones mentioned in Fig. 12.

The overhead of the network for both the schemes is shown in Fig. 14. In the Figure, three different scenarios for overhead are shown by considering 150, 250 and 350 nodes in the network. With the increasing total number of nodes in the network, the overhead increases. The possible reason for these observation is that with increasing number of nodes in the network, the possibility of presence of more number of intermediate nodes between a pair of source-destination nodes is more. As a result, these nodes transmit and receive the ACT, REQ, and REP messages. In each of the plots in Figs. 14(a), 14(b), and 14(c), there is gradual degradation in overhead with increasing communication range. The possibility of presence of more number of nodes increases with an increase in the communication range. Therefore, the overhead decreases with the increase in the communication range.

In Fig. 15, the variation of overhead versus variable communication range is shown. For the same reason as mentioned in the case of Fig. 14, these plots have the similar decreasing trend with the increase in the communication range.

Fig. 16 depicts the variations in success rate with increasing communication range from 50 to 75m in steps of 5m. In each of the plots in Figs. 16(a), 16(b), and 16(c), there


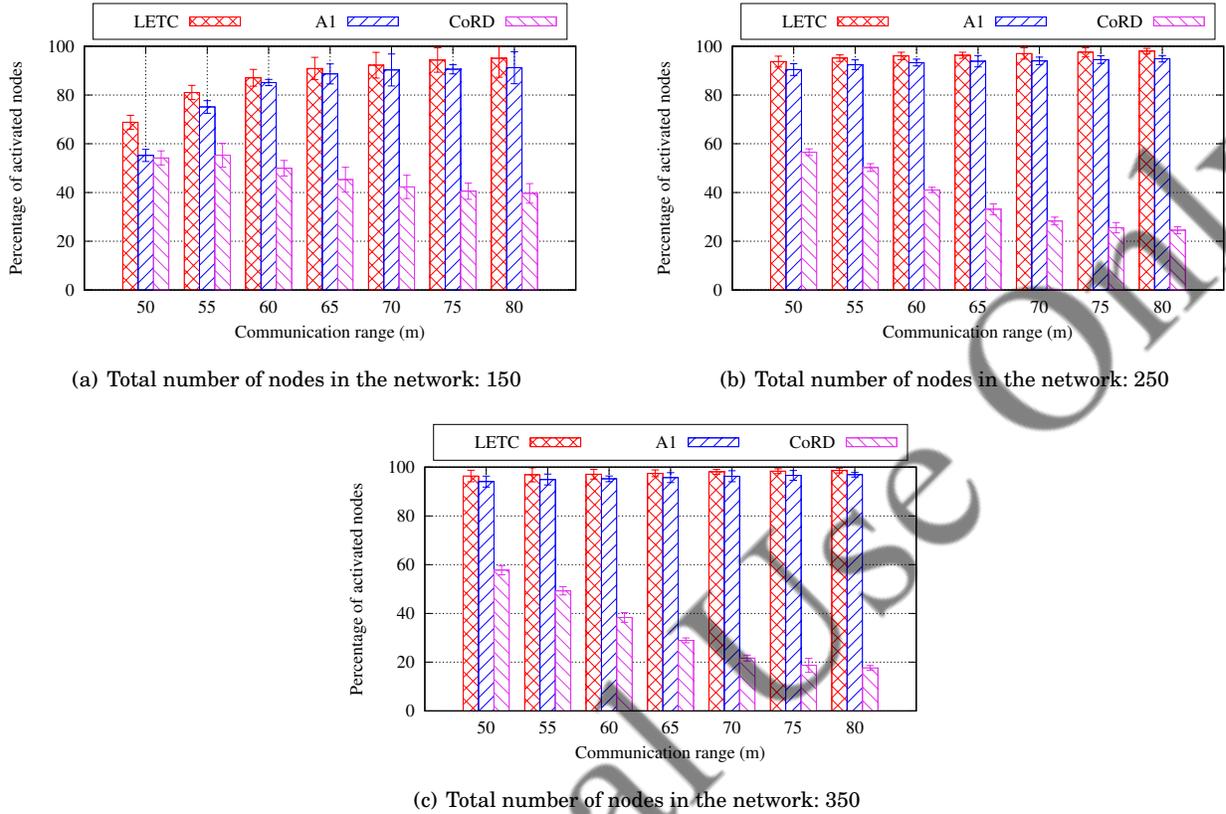



Fig. 18. Percentage of activated node in LETC, A1, and CoRD

is a general increasing trend in success rate with the increase in the communication range of nodes. When the total number of nodes in the network is 150, the success rate is below unity, because there does not exist sufficient number of intermediate nodes to re-establish connectivity for all the dumb nodes. However, in rest of the cases, the success rate attained is unity. The success rate with variable communication range is shown in Fig. 17. In Figs. 10 - 17, the performances of *CoRD* and *CoRDWAC* are shown. In *CoRD*, there is a constraint to choose neighbor nodes for re-establishing connectivity between the START and the END nodes, whereas in *CoRDWAC*, there is no such constraint. Therefore, in Figs. 16 and 17, *CoRDWAC* exhibits better performance with respect to only success rate, but there is inferior performance with respect to the percentage of activated nodes, average path length, and overhead.


In addition to the performance results for *CoRD* and *CoRDWAC*, we have shown the plots comparing another two topology control algorithm *LETC* [Torkestani 2013] and *A1* [Rizvi et al. 2012], in Figs. 18 - 20. In *LETC* and *A1*, topology is maintained by forming *Connected Dominating Sets* (CDS) and the nodes belong to this set. We have implemented *LETC* and *A1* in our experimental setting along with *CoRD*. The percentage of activated nodes in *LETC*, *A1* and *CoRD* is shown in Fig. 18. The percentage of nodes activated increases with increasing communication range in case of *LETC* and *A1*, whereas in case of *CoRD*, it decreases. With the increase in communication range, the possibility of the presence of more number of nodes within the communication range also increases. Therefore, in *LETC* and *A1*, more number of nodes

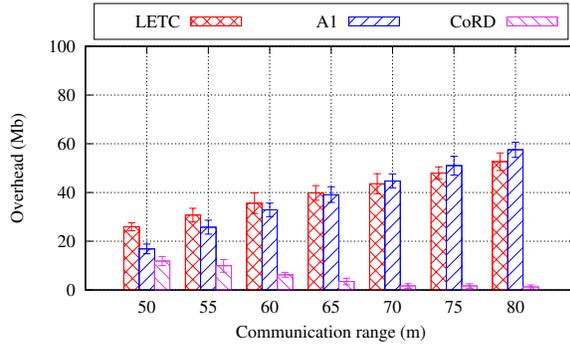

(a) Total number of nodes in the network: 150

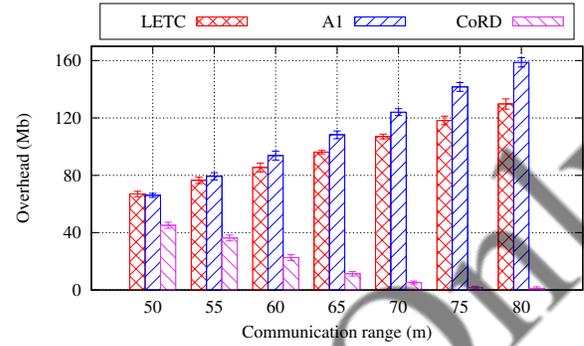

(b) Total number of nodes in the network: 250

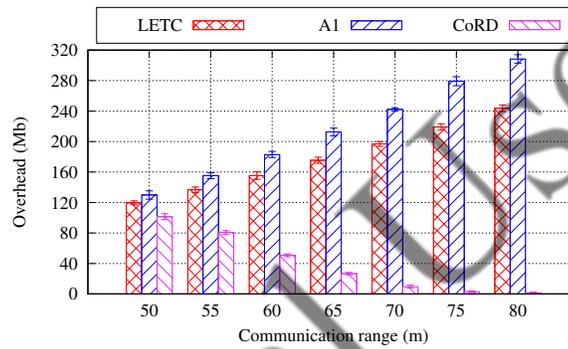


(c) Total number of nodes in the network: 350

Fig. 19. Overhead of LETC, A1, and CoRD


get included in CDS with the increase in communication range. However, in case of *CoRD*, initially, a minimum set of nodes is activated to maintain topology. After dumb node get created a minimum subset of additional nodes is activated to re-establish connectivity. As the increase in communication range decreases the number of dumb nodes, the number of nodes activated also decreases with the in communication range.

The overheads in *LETC*, *A1*, and *CoRD* are shown in Fig. 19. As the number of nodes activated increases with increasing communication range, the number of control messages transferred in the network also increases. As the overhead is dependent on the control message transfer in the network, it increases with the increase in communication range in case of *LETC* and *A1*. However, in case of *CoRD*, it is observed there is less overhead with the increase in communication range due to the decrease in the number of activated nodes, with the increase in communication range.


The energy consumption of the network is also an important parameter in WSN. The number of nodes activated and the overhead increases with increasing communication range in case of *LETC* and *A1*, but in case of *CoRD*, it is the reverse. The energy consumption in the network is dependent upon both the overhead and the number of node activated in the network. Therefore, as seen in Fig. 20, there is an increasing trend of energy consumption with the increase in communication range in case of *LETC* and *A1*, and a decreasing trend in case of *CoRD*.

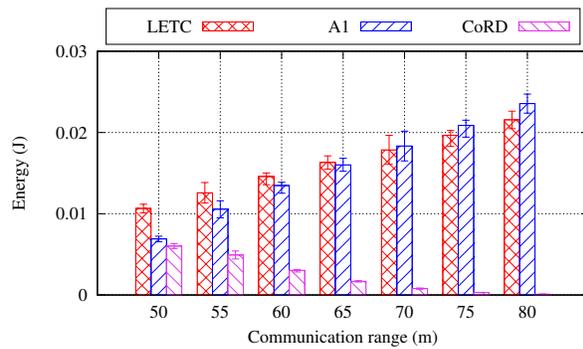

(a) Total number of nodes in the network: 150

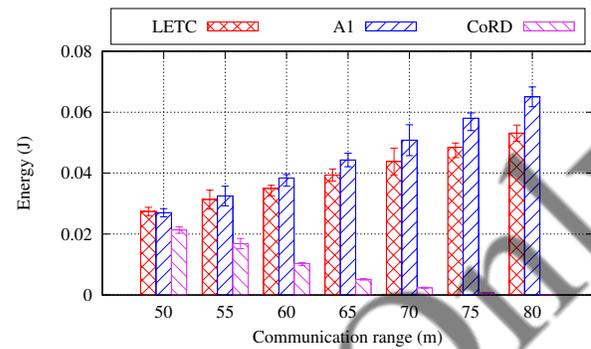

(b) Total number of nodes in the network: 250

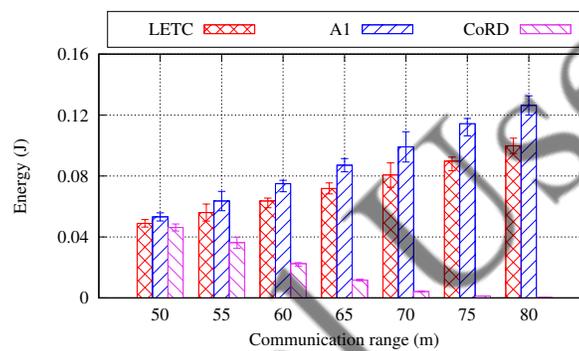

(c) Total number of nodes in the network: 350

Fig. 20. Energy consumption of LETC, A1, and CoRD

## 8. CONCLUSION

In this work, we have considered the problem of topology control in sensor networks with temporary connection impairment due to the occurrence of adverse environmental conditions. As the dumb nodes get isolated from the network, it is a challenge to get information sensed by these nodes to the rest part of the network. The lack of connectivity among nodes due to the occurrence of dumb behavior in WSN is distinct from the traditional existing problem of loss of connectivity arising due to the failure of nodes. To re-establish connectivity and maintain self-adaptivity of nodes in WSNs, we propose a price-based scheme for topology control. Simulation-based experiments show that the proposed scheme yields better performance with respect to the number of nodes activated, overhead, and energy consumption than the existing topology management protocols, LETC and A1.

In the future, we plan to extend our work with respect to re-establishment of connectivity in the presence of heterogeneous sensor nodes, detection of dumb node using a game theoretic approach, and transfer of sensed information from a dumb node to a sink node by data mules. Game theory embeds the dynamic formulation and incorporation of strategies. As already discussed, dumb behavior is temporary and dynamic. Therefore, an approach using mathematical optimization is appropriate, as every time the network topology changes, it would be required to perform all the steps of the optimization algorithm at each iteration. Intuitively, this is computationally intensive

and time consuming as well. Using the game theoretic approach, we can avoid these limitations.

## REFERENCES

- I. F. Akyildiz, W. Su, Y. Sankarasubramaniam, and E. Cayirci. 2002a. Wireless Sensor Networks: A Survey. *Computer Networks* 38, 4 (2002), 393–422.
- I. F. Akyildiz, S. Weilian, Y. Sankarasubramaniam, and E. Cayirci. 2002b. A Survey on Sensor Networks. *Communications Magazine* 40, 8 (November 2002), 102–114.
- H. M. Ammari and S. K. Das. 2006. Coverage, Connectivity, and Fault Tolerance Measures of Wireless Sensor Networks. In *Proceedings of 8<sup>th</sup> International Symposium on Stabilization, Safety, and Security of Distributed Systems*, Vol. 4280. 35–49.
- G. Anastasi, A. Falchi, A. Passarella, M. Conti, and E. Gregori. 2004. Performance Measurements of Mote Sensor Networks. In *Proceedings of the 7<sup>th</sup> ACM International Symposium on Modeling, Analysis and Simulation of Wireless and Mobile Systems*. New York, USA, 174–181.
- M. K. Banavar, C. Tepedelenlioglu, and A. Spanias. 2010. Estimation Over Fading Channels With Limited Feedback Using Distributed Sensing. *IEEE Transactions on Signal Processing* 58, 1 (2010).
- K. Bannister, G. Giorgetti, and S. Gupta. 2008. Wireless Sensor Networking for Hot Applications: Effects of Temperature On Signal Strength, Data Collection and Localization. In *In Proceedings of the 5<sup>th</sup> Workshop on Embedded Networked Sensors*. Virginia, USA.
- S. Bhattacharjee, P. Roy, S. Ghosh, S. Misra, and M. S. Obaidat. 2012. Wireless sensor network-based fire detection, alarming, monitoring and prevention system for Bord-and-Pillar coal mines. *The Journal of Systems and Software* 85, 3 (March 2012), 571–581.
- N. Biswas, B. Ghos, and A. Chandra. 2013. Energy efficient relay node placement in a eta-mu fading channel. In *Proceedings of IEEE Conference on Information & Communication Technologies*. 824–828.
- C. A. Boano, N. Tsiftes, T. Voigt, J. Brown, and U. Roedig. 2010. The Impact of Temperature on Outdoor Industrial Sensor Applications. *IEEE Transactions on Industrial Informatics* 6, 3 (August 2010), 451–459.
- J. Bonvoisin, A. Lelah, F. Mathieux, and D. Brissaud. 2011. Environmental Impact Assessment Model for Wireless Sensor Networks. In *Proceedings of the 18<sup>th</sup> CIRP International Conference on Life Cycle Engineering*. 124–129.
- L. Buttyan and J.P. Hubaux. 2001. *Nuglets: A Virtual Currency to Stimulate Cooperation in Selforganized Mobile Ad-Hoc Networks*. Technical Report DSC/2001/001. Swiss Federal Institute of Technology, Switzerland.
- R. Chandrasekar, S. Misra, and M. S. Obaidat. 2008. A Probabilistic Zonal Approach for Swarm-Inspired Wildfire Detection Using Sensor Networks. *International Journal of Communication Systems* 21, 10 (2008), 1047–1073.
- A. Ahlen D. E. Quevedo and K. H. Johansson. 2013. State Estimation Over Sensor Networks With Correlated Wireless Fading Channels. *IEEE Trans. Automat. Control* 58, 3 (2013), 581–593.
- G. Dini, M. Pelagatti, and I. M. Savino. 2008. An Algorithm for Reconnecting Wireless Sensor Network Partitions. In *Proceedings of the 5<sup>th</sup> European conference on Wireless sensor networks*. 253–267.
- Jingbo Dong, Qing Chen, and Zhisheng Niu. 2007. Random graph theory based connectivity analysis in wireless sensor networks with Rayleigh fading channels. In *Asia-Pacific Conference on Communications*. 123–126.
- N. Edalat, Xiao. Wendong, Tham Chen-Khong, E. Keikha, and Ong Lee-Ling. 2009. A price-based adaptive task allocation for Wireless Sensor Network. In *6<sup>th</sup> International Conference on Mobile Adhoc and Sensor Systems*. 888–893.
- G. J. Fan and S. Y. Jin. 2010. Coverage Problem in Wireless Sensor Network: A Survey. *Journal of Networks* 5, 9 (Sept 2010).
- Jun Fang and Hongbin Li. 2008. Distributed compression and estimation for wireless sensor networks with noisy channels. In *42<sup>nd</sup> Annual Conference on Information Sciences and Systems*. 1048–1052.
- A. Fanimokun and J. Frolik. 2003. Effects Of Natural Propagation Environments On Wireless Sensor Network Coverage Area. In *Proceedings of the 35<sup>th</sup> Southeastern Symposium on System Theory*. 16–20.
- C. L. Fok, G. C. Roman, and C. Lu. 2009. Agilla: A Mobile Agent Middleware for Self-adaptive Wireless Sensor Networks. *ACM Transactions on Autonomous and Adaptive Systems* 4, 3, Article 16 (July 2009), 26 pages.
- H. M. Ammari and S. K. Das. 2008. Integrated Coverage and Connectivity in Wireless Sensor Networks: A Two-Dimensional Percolation Problem. *IEEE Trans. Comput.* 57, 10 (2008), 1423–1434.

- Z. Jiang, J. Wu, A. Agah, and B. Lu. 2007. Topology Control for Secured Coverage in Wireless Sensor Networks. In *Mobile Adhoc and Sensor Systems*. 1–6.
- P. Kar and S. Misra. 2015. Detouring dynamic routing holes in stationary wireless sensor networks in the presence of temporarily misbehaving nodes. *International Journal of Communication Systems* (2015).
- B. Khelifa, Algeria Bechar Univ., H. Haffaf, M. Madjid, and D. Llewellyn-Jones. 2009. Monitoring Connectivity in Wireless Sensor Networks. In *Proceedings of Symposium on Computers and Communications*. 507–512.
- B. Krishnamachari and S. Iyengar. 2004. Distributed Bayesian Algorithms for Fault-Tolerant Event Region Detection in Wireless Sensor Networks. *IEEE Trans. Comput.* 53, 3 (March 2004), 241–250.
- C. A. Levis. 2005. *Encyclopedia of RF and Microwave Engineering*. Wiley.
- H. Liu and B. Krishnamachari. 2006. A Price-based Reliable Routing Game in Wireless Networks. In *Proceeding from the 2006 Workshop on Game Theory for Communications and Networks*. Article 7.
- X. Liu. 2006. Coverage with Connectivity in Wireless Sensor Networks. In *3<sup>rd</sup> International Conference on Broadband Communications, Networks and Systems*. 1–8.
- E. L. Lloyd. 2007. Relay Node Placement in Wireless Sensor Networks. *IEEE Trans. Comput.* 56, 1 (January 2007), 134–138.
- A. Markham, N. Trigoni, and S. Ellwood. 2011. Effect of Rainfall On Link Quality In An Outdoor Forest Deployment. In *Proceedings of the International Conference on Wireless Information Networks and Systems (WINSYS)*. 1–6.
- M. Chatterjee and S. Sengupta. 2010. A Game Theoretic Framework for Power Control in Wireless Sensor Networks. *IEEE Trans. Comput.* 59, 2 (February 2010), 231–242.
- S. Misra and A. Jain. 2011. Policy Controlled Self-Configuration in Unattended Wireless Sensor Networks. *Journal of Networks and Computer Applications* 34, 5 (September 2011), 1530–1544.
- S. Misra, P. Kar, A. Roy, and M. S. Obaidat. 2014. Existence of dumb nodes in stationary wireless sensor networks. *Journal of Systems and Software* 91 (May 2014), 135–146.
- S. Misra, M. P. Kumar, and M. S. Obaidat. 2011. Connectivity preserving localized coverage algorithm for area monitoring using wireless sensor networks. *Computer Communications* 34, 12 (August 2011), 1484–1496.
- Y. Mostofi and R. Murray. 2004. Effect of time-varying fading channels on control performance of a mobile sensor. In *First Annual IEEE Communications Society Conference on Sensor and Ad Hoc Communications and Networks*. 317–324.
- S. H. Mousavi, J. Haghighat, W. Hamouda, and R. Dastbasteh. 2016. Analysis of a Subset Selection Scheme for Wireless Sensor Networks in Time-Varying Fading Channels. *IEEE Transactions on Signal Processing* 64, 9 (2016).
- F. Nadeem, E. Leitgeb, M. S. Awan, and S. Chessa. 2009. Comparing the Life Time of Terrestrial Wireless Sensor Networks by Employing Hybrid FSO/RF and Only RF Access Networks. In *Proceedings of the 2009 Fifth International Conference on Wireless and Mobile Communications*. 134–139.
- U. Okorafor and D. Kundur. 2009. On the Relevance of Node Isolation to the K-Connectivity of Wireless Optical Sensor Networks. *IEEE Transactions on Mobile Computing* 10 (2009), 1427–1440.
- L. Paradis and Q. Han. 2007. A Survey on Fault Management in Wireless Sensor Networks. *Journal of Network and Systems Management* 15, 2 (June 2007), 171–190.
- R. Rajagopalan and P. K. Varshney. 2009. Connectivity Analysis of Wireless Sensor Networks with Regular Topologies in the Presence of Channel Fading. *IEEE Transactions on Wireless Communications* 8, 7 (July 2009), 3475–3483.
- S. Rizvi, H. K. Qureshi, S. A. Khayam, V. Rakocevic, and M. Rajarajan. 2012. A1: An energy efficient topology control algorithm for connected area coverage in wireless sensor networks. *Journal of Network and Computer Applications* 35, 2 (March 2012), 597–605.
- A. Roy, P. Kar, and S. Misra. 2014a. Detection of Dumb Nodes in a Stationary Wireless Sensor Network. In *Proceedings of 11<sup>th</sup> IEEE India Conference*. Pune, India, 1–6.
- A. Roy, P. Kar, S. Misra, and M. S. Obaidat. 2014b. D3: Distributed Approach for the Detection of Dumb Nodes in Wireless Sensor Networks. *International Journal of Communication Systems* (2014). DOI: 10.1002/dac.2913.
- A. Roy, A. Mondal, and S. Misra. 2014c. Connectivity Re-establishment in the Presence of Dumb Nodes in Sensor-Cloud Infrastructure: A Game Theoretic Approach. In *Proceedings of 6<sup>th</sup> International Conference on Cloud Computing Technology and Science*. Singapore, 847–852.
- P. Sarigiannidis, E. Karapistoli, and A. A. Economides. 2015a. Detecting Sybil attacks in wireless sensor networks using UWB ranging-based information. *Expert Systems with Applications* 42, 21 (2015), 7560–7572.

- P. Sarigiannidis, E. Karapistoli, and A.A. Economides. 2015b. VisIoT: A threat visualisation tool for IoT systems security. In *Proceedings of IEEE International Conference on Communication Workshop (ICCW)*. 2633–2638.
- F. Senel, M. F. Younis, and K. Akkaya. 2011. Bio-Inspired Relay Node Placement Heuristics for Repairing Damaged Wireless Sensor Networks. *IEEE Transactions on Vehicular Technology* 60, 4 (May 2011), 1835–1848.
- J. A. Torkestani. 2013. An Energy-Efficient Topology Construction Algorithm for Wireless Sensor Networks. *Computer Networks(Elsevier)* 57, 7 (2013), 1714–1725.
- Y. Tseng, W. Lai, C. Huang, and F. Wu. 2010. Using Mobile Mules for Collecting Data from an Isolated Wireless Sensor Network. In *39<sup>th</sup> International Conference on Parallel Processing*. 673–679.
- Yu Wang, Lijuan Cao, Teresa A. Dahlberg, Fan Li, and Xinghua Shi. 2009. Self-organizing Fault-tolerant Topology Control in Large-scale Three-dimensional Wireless Networks. *ACM Transactions on Autonomous and Adaptive Systems* 4, 3, Article 19 (July 2009), 21 pages.
- T. Yang, Y. Sun, J. Taheri, and A. Y. Zomaya. 2013. DLS: A dynamic local stitching mechanism to rectify transmitting path fragments in wireless sensor networks. *Journal of Network and Computer Applications* 36, 1 (January 2013), 306–315.
- H. Zhang, L. Sang, and A. Arora. 2009. On the Convergence and Stability of Data-driven Link Estimation and Routing in Sensor Networks. *ACM Transactions on Autonomous and Adaptive Systems* 4, 3, Article 18 (Jul 2009), 29 pages.